



00600A1AAGA02L

Adapter

10GHz 50Ω SMA(M)–Quick SMA(M)
Adapter/Gold/Air Insulator

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.1:1(Max.)
Impedance	50Ω
Connection 1	Quick SMA Male
Connection 2	SMA Male

Mechanical


Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Gasket	Silicone Rubber	
C-Ring	Beryllium Copper	Gold

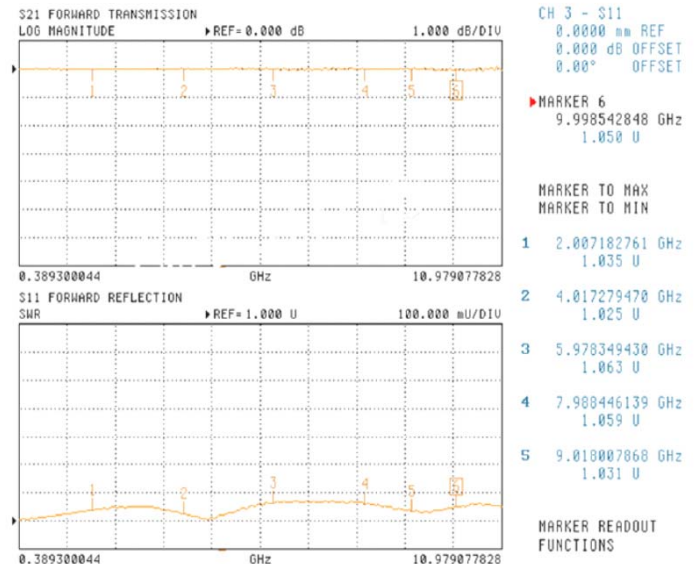

Outling Drawing (Unit:mm) Tolerance:X=±0.2mm ,X.X=±0.1mm,X.XX=±0.05mm

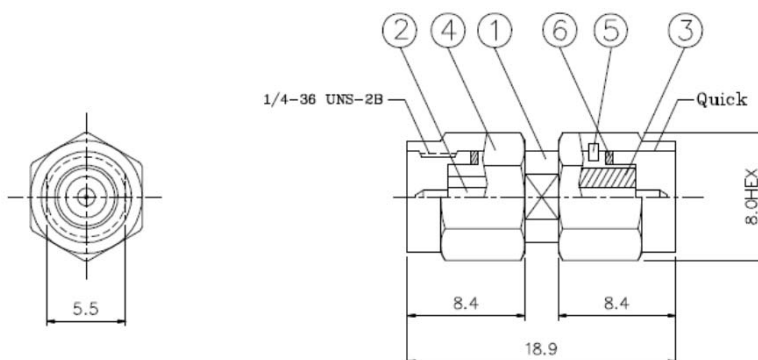

All Specification Changed Without Notification.