



00600A1ABG6017

Adapter


18GHz 50Ω SMA(M)–Quick SMA(F) Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

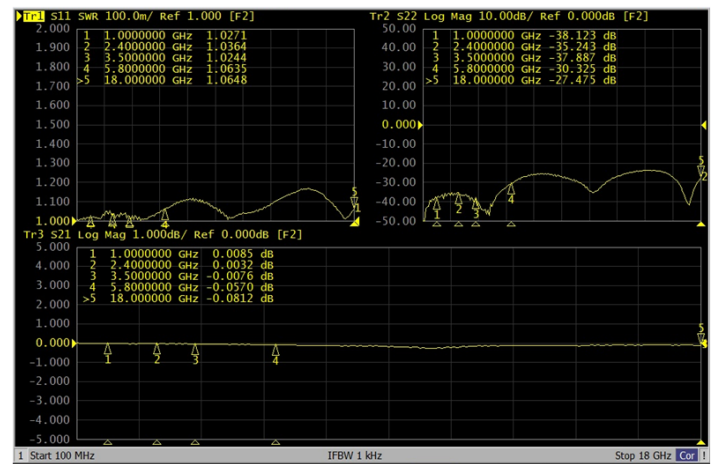

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	Quick SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Beryllium Copper	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone	Red
Body	Brass	Gold
Shell	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

