

Features:

High Repeatability
Low VSWR

Specifications:

Electrical:

Frequency:DC-4GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 50Ohm
Connection: SMA Male-SMB Plug

Mechanical:



Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C



Unit:mm

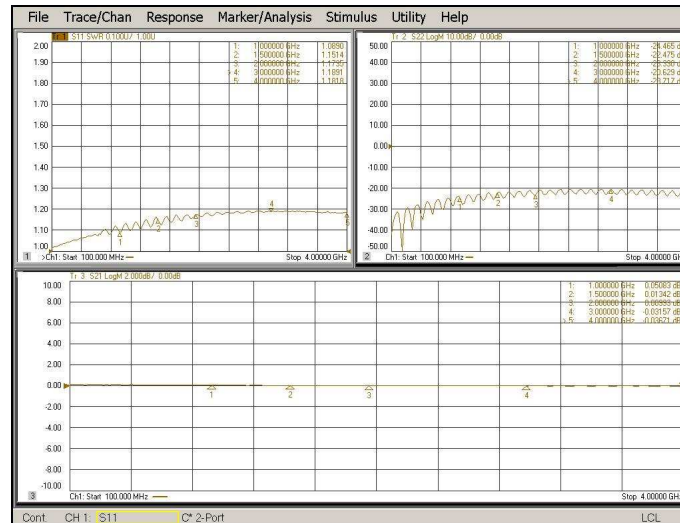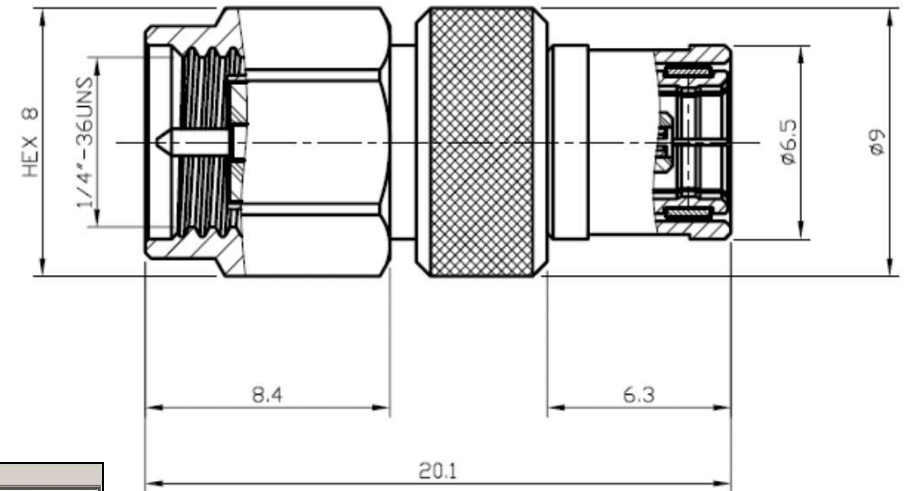

woken
technology inc.



woken
technology inc.

Material:

Part	Material	Plated
Shell	Brass	Gold
Inner Retaining Ring	Beryllium Copper	Gold
Gasket	Silicone	Nickel
Inner Retaining Ring	Stainless	
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
Body	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT				ANGULAR DIMENSIONS ± TOLANG			
x	±0.38	.xx	±0.15	HOLES UNDER Ø5.0 ±0.05			
.x	±0.25	.xx x	±				
THIRD ANGLE PROJECTION				DRAWN	Terence	08/11/14'	
				ENGR	Jack	08/11/14'	
				APVD	James	08/11/14'	



Woken Technology Inc.

CODE	DWG TITLE
	4GHz SMA(M)-SMB(P) Adapter
SIZE	DWG NO.
A4	00600A1B1G3017
REV	
B	