



00600A1D2N301G

Adapter


6GHz 50Ω BNC(F)–SMA(M)  
Adapter/Nickel

### Features

- ✓ High Repeatability
- ✓ Low VSWR



### Test Report

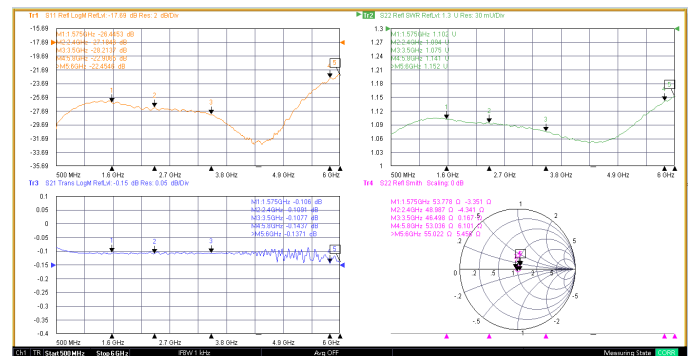

### Electrical Specifications

Frequency	DC-6GHz
VSWR	1.30:1(Max.)
Impedance	50Ohm
Connection 1	BNC Female
Connection 2	SMA Male

### Mechanical

Durability	500 Cycles
------------	------------

### Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

### Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	PTFE	
Inner Retaining Ring	SUS304	
Gasket	Silicone	
Shell	Brass	Nickel

### Outling Drawing (Unit:mm)

