

4

3

2

1

Features:

High Repeatability
Low VSWR

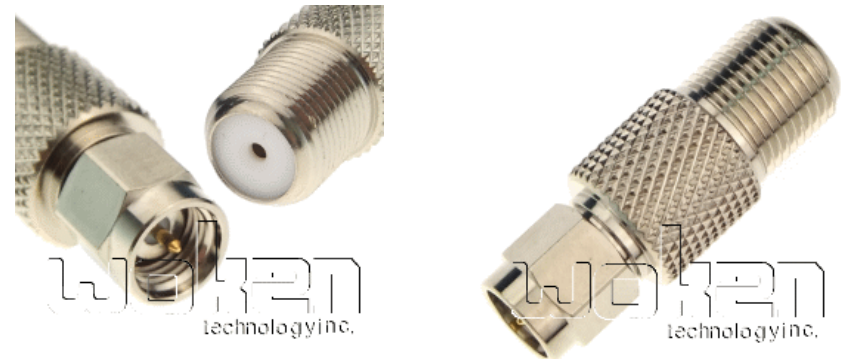
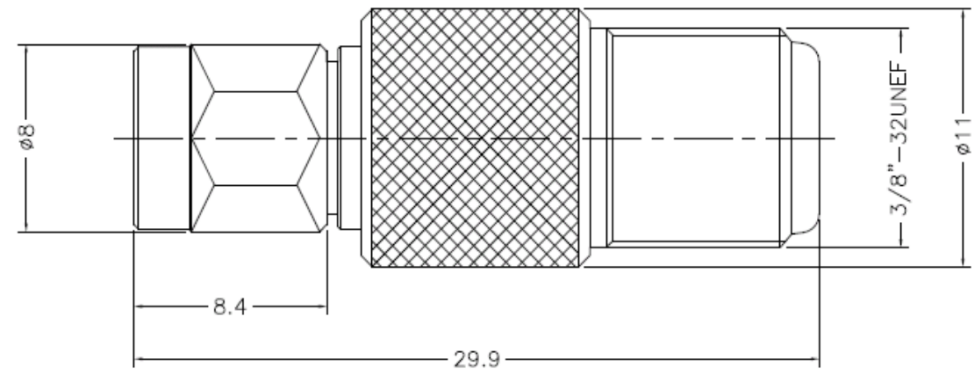
**Specifications:****Electrical:**

Connection: 50Ω SMA Male to 75Ω F Female

Mechanical:

Durability:500 Cycles

Unit:mm

**Material:**

Part	Material	Plated
Center contact	Beryllium copper	
Shell	Brass	Nickel
inner Retaining Ring	Stainless	
Gasket	S.L.Rubber	
Center Pin	Brass	Gold
Insulator	Teflon	
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

04/01/09'

04/01/09'

04/01/09'



Woken Technology Inc.

CODE

DWG TITLE

50Ω SMA(M)-75Ω F(F) Adapter

SIZE

A4

REV

A

DWG NO.

00600A1F2MA017

4

3

2

1