



00600A1M2G3017

Adapter


6GHz 50Ω MCX(J)–SMA(M)
Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

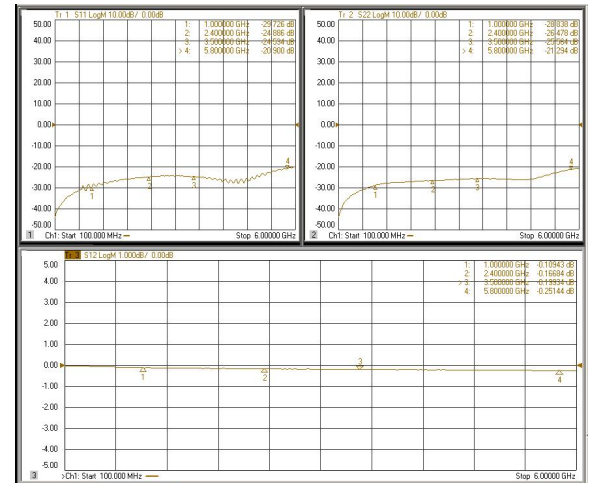

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.25:1(Max.)
Impedance	50Ohm
Connection 1	MCX Jack
Connection 2	SMA Male

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless	
Gasket	Silicone	
Shell	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±0.2mm

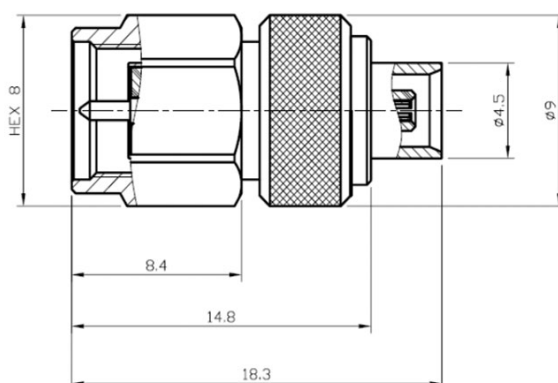

All Specification Changed Without Notification.