

4

3

2

1

Features:

High Repeatability
Low VSWR



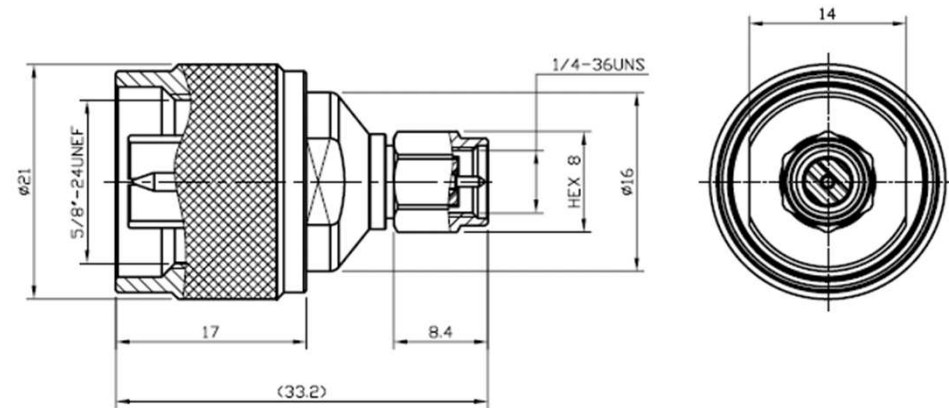
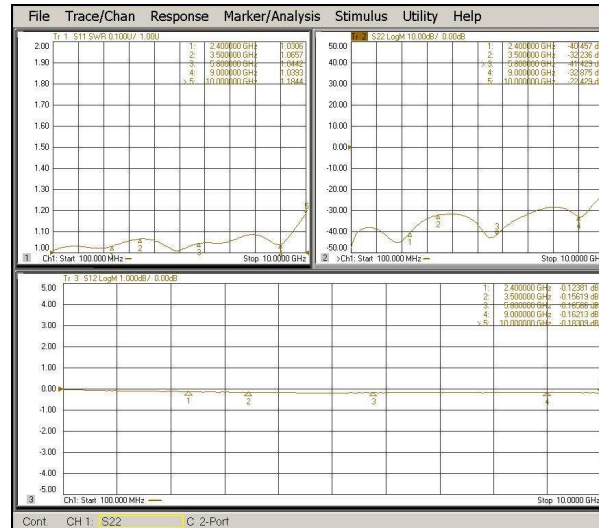
Unit:mm

Specifications:**Electrical:**

Frequency:DC-10GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 50Ohm
Connection: N Male to SMA Male

Mechanical:

Durability:500 Cycles
Environmental:
Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Shell	Brass	Nickel
Body	Brass	Nickel
Center Pin	Brass	Gold
Gasket	Silicone	Red
Inner Retaning Ring	Brass	
Insulator	Teflon	
Inner Retaning Ring	Stainless	

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN	Terence	07/21/14'
ENGR	Jack	07/21/14'
APVD	James	07/21/14'



Woken Technology Inc.

CODE

DWG TITLE

10GHz N(M)-SMA(M) Adapter

SIZE

A4

REV

B

DWG NO.

00600A1N1NA027

4

3

2

1