



00600A1Q1G6017

Adapter


18GHz 50Ω Quick SMA(M)–SMA(F) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

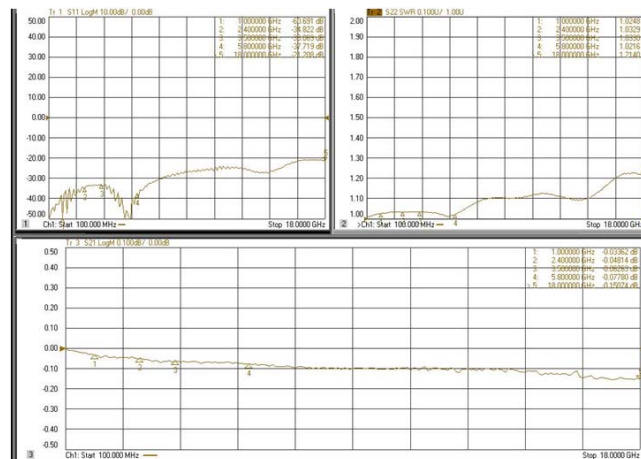

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	Quick SMA Male
Connection 2	SMA Female

Mechanical

Durability	SMA Female:500 Cycles Quick SMA Male:3,000 Cycles
------------	--

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium copper	Gold
Insulator	Teflon	
Press Body	Beryllium copper	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

