



00600A1X1G3017

Adapter

8GHz 50Ω MMCX(P)–SMA(M)
Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications


Frequency	DC-8GHz
Impedance	50Ohm
VSWR	1.3:1(Max.)
Connection	MMCX Plug-SMA Male

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

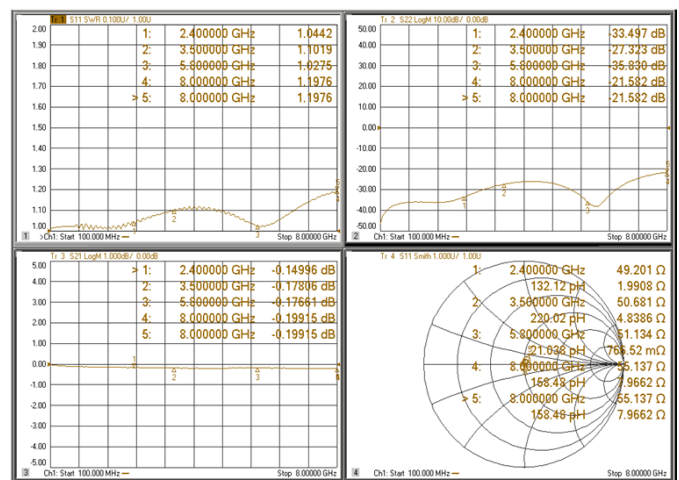

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless Steel	
C-Ring	Beryllium Copper	Gold
Gasket	Silicone	Red
Shell	Brass	Gold

Outling Drawing (Unit:mm) ±0.1mm

