



# 00600A2A2DA997

## Adapter

### 8GHz 50Ω SMA(F)–SMA(F)R/A Adapter/Gold

#### Features

- ✓ High Repeatability
- ✓ Low VSWR



#### Electrical Specifications

Frequency	DC-8GHz
VSWR	1.3:1(Max.)@DC-6GHz 1.5:1(Max.)@6-8GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	SMA Female

#### Mechanical

Durability	500 Cycles
------------	------------


#### Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

#### Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	

#### Outling Drawing (Unit:mm) Tolerance:±0.4mm

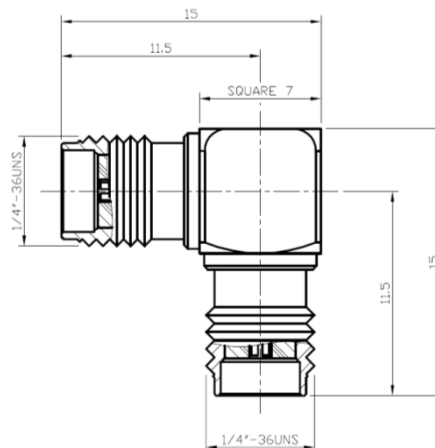

All Specification Changed Without Notification.