




00600A2A5G601L

Adapter

18GHz 50Ω SMA(F)–Reverse SMA(F) Adapter/Gold/Air Insulator

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	1.25:1(Max.)
Insertion Loss	0.2dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Reverse SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------



Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Test Report

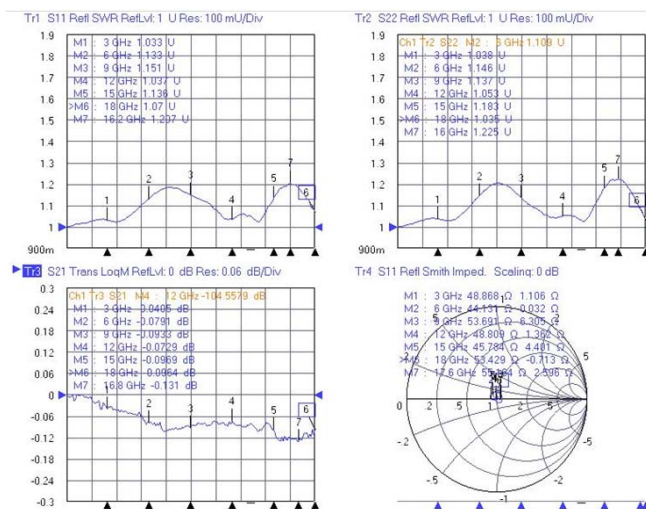

Outling Drawing (Unit:mm) Tolerance:X=±0.2mm ,X.X=±0.1mm,X.XX=±0.05mm

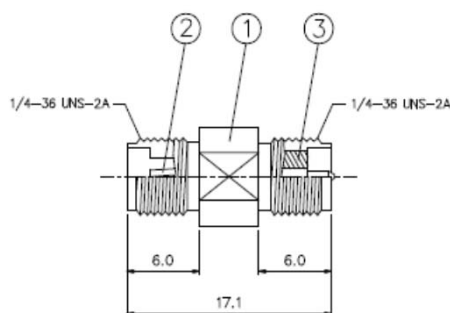

All Specification Changed Without Notification.