



00600A2A9GA02L

Adapter

10GHz 50Ω SMA(F)–SMA(F)
Bulkhead with O-Ring
Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Insertion Loss	0.2dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
O-ring	Silicone	Red
Nut	Brass	Gold
Washer	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

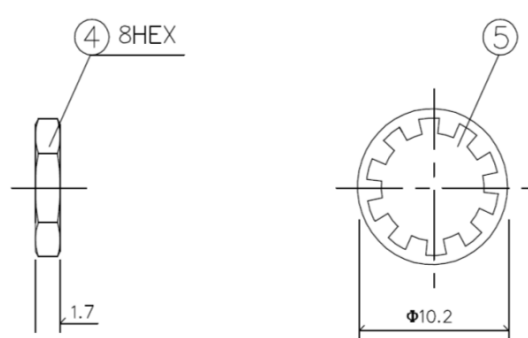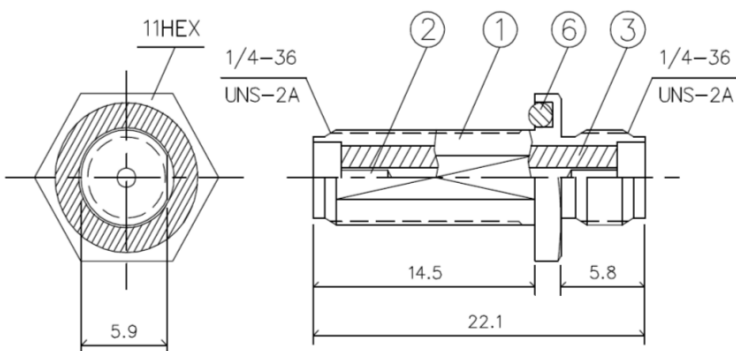

Test Report

