



00600A2A9GA03L

Adapter

10GHz 50Ω SMA(F)–SMA(F) Bulkhead Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Impedance	50Ω
Connection 1	SMA Female
Connection 2	SMA Female Bulkhead

Mechanical


Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Nut	Brass	Gold
Washer	Brass	Gold

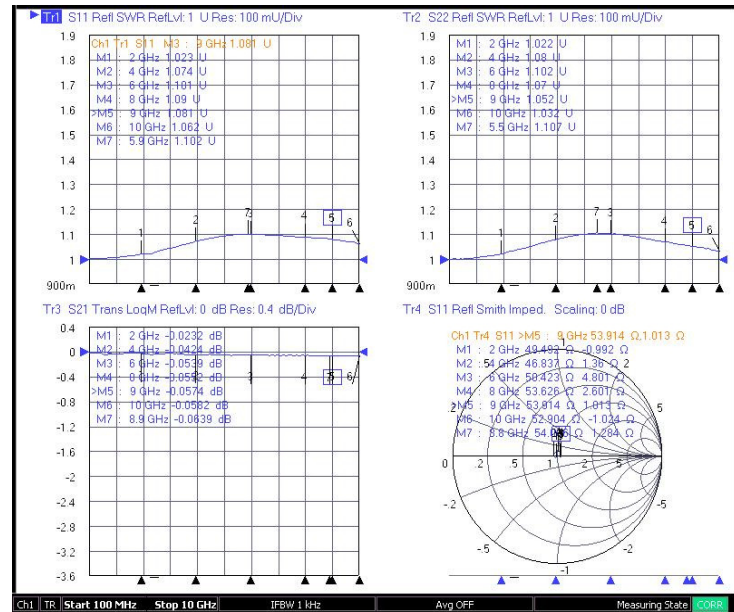

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

