



00600A2ABGB01L

Adapter

10GHz 50Ω SMA(F)–Quick SMA(F)  
Adapter/Gold

### Features

- ✓ High Repeatability
- ✓ Low VSWR



### Test Report

#### Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Impedance	50Ω
Connection 1	SMA Female
Connection 2	Quick SMA Female

#### Mechanical


Durability	500 Cycles
------------	------------

#### Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

#### Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	

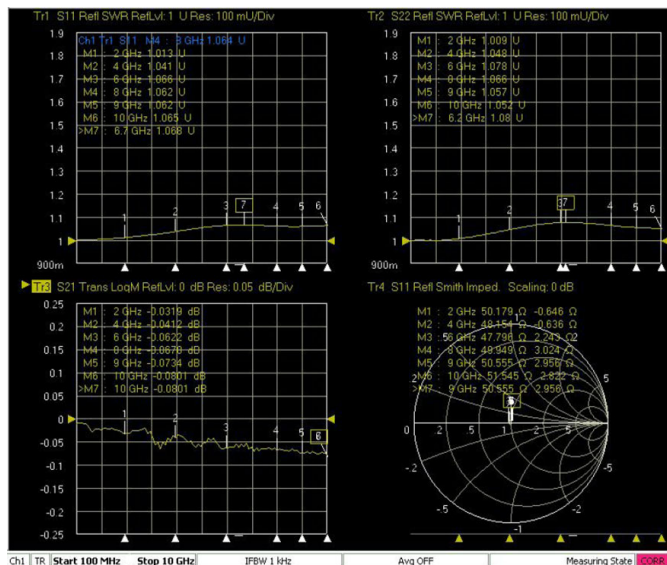

Outling Drawing (Unit:mm) Tolerance:X=±0.2mm ,X.X=±0.1mm,X.XX=±0.05mm

