



00600A2AEG0017

Adapter


12GHz Reverse Quick SMA(M)– SMA(F) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

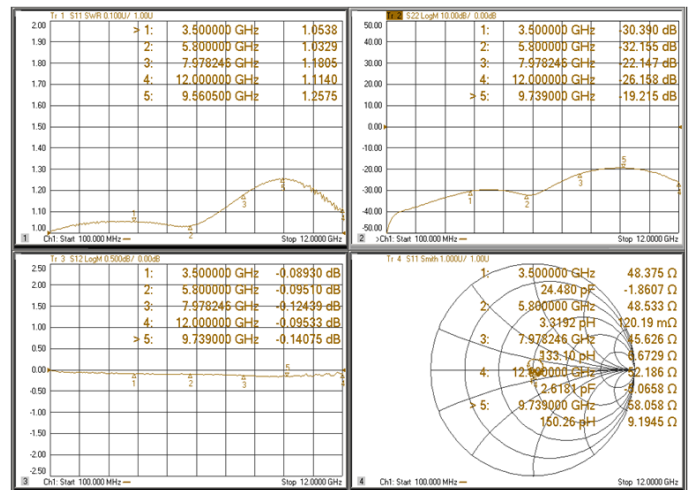

Electrical Specifications

Frequency	DC-12GHz
VSWR	1.3:1(Max.)@DC-10GHz 1.35:1(Max.)@10-12GHz
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	Reverse Quick SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Press Body	Beryllium Copper	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

