



00600A2AHGA01L

Adapter

10GHz 50Ω SMA(F)–Reverse SMA(F) 4Hole Flange Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Reverse SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-65°C~155°C
-----------------------	-------------

Material


Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Test Report

Insertion Loss

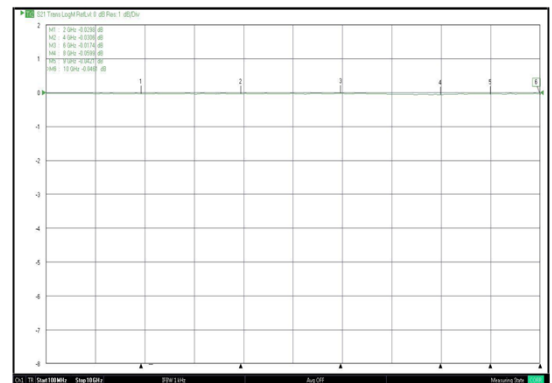

VSWR

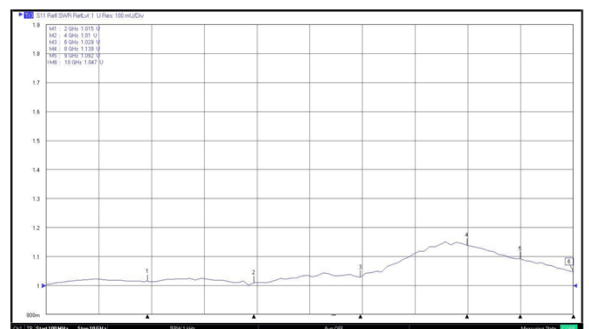

Outling Drawing (Unit:mm) Tolerance:±0.1mm

