




# 00600A2B1G3017

## Adapter

**4GHz 50Ω SMA(F)–SMB(P)  
Adapter/Gold**

### Features

- ✓ High Repeatability
- ✓ Low VSWR



### Test Report

### Electrical Specifications


Frequency	DC-4GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ω
Connection 1	SMA Female
Connection 2	SMB Plug

### Mechanical

Durability	500 Cycles
------------	------------

### Environmental


Operating Temperature	-40°C~85°C
-----------------------	------------

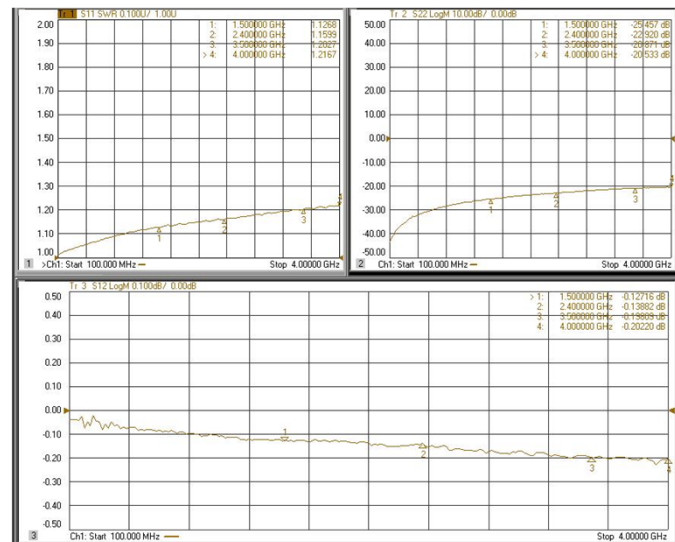

### Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Inner Retaining Ring	Beryllium Copper	Gold
Shell	Brass	Gold

### Outling Drawing (Unit:mm) Tolerance:±0.4mm

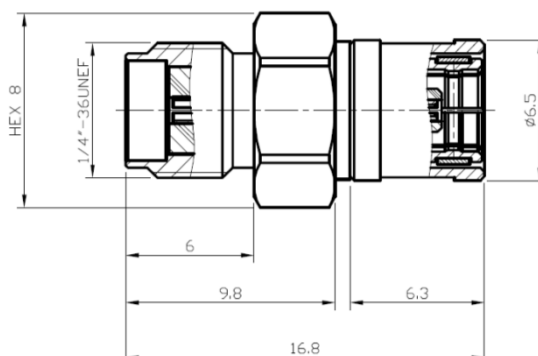

All Specification Changed Without Notification.