

4

3

2

1

**Features:**

High Repeatability  
Low VSWR



Unit:mm

**Specifications:****Electrical:**

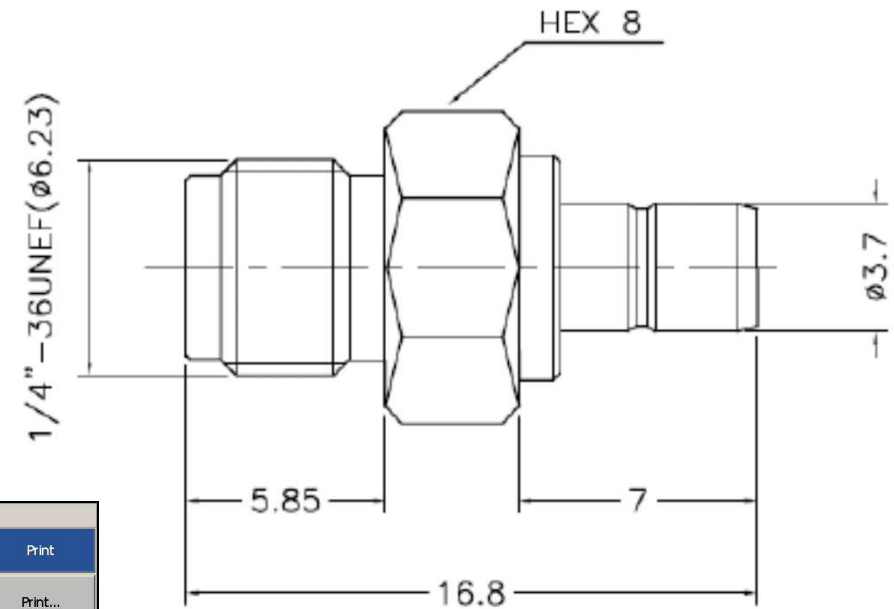
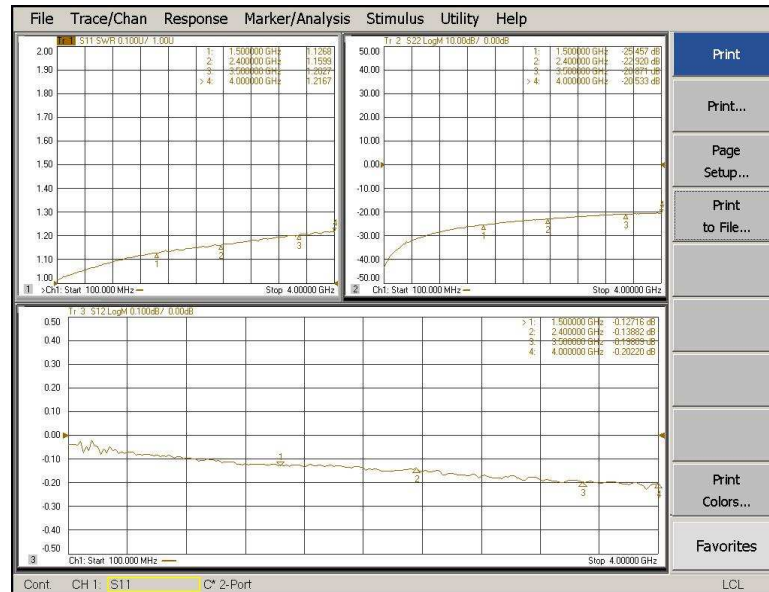
Frequency:DC-4GHz  
VSWR:1.3:1(Max.)  
Insertion Loss:0.5dB(Max.)  
Impedance: 50ohm  
Connection: SMA Male to SMB Jack

**Mechanical:**

Durability:500 Cycles

**Environmental:**

Temperature: -40°C~85°C

**Material:**

| Part       | Material | Plated |
|------------|----------|--------|
| Body       | Brass    | Gold   |
| Center Pin | Brass    | Gold   |
| Insulator  | Teflon   |        |

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS  
ARE IN mm AND TOLERANCES ARE:

## INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

## ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

09/01/14'

ENGR Jack

09/01/14'

APVD James

09/01/14'



Woken Technology Inc.

CODE

DWG TITLE

4GHz SMA(F)-SMB(J) Adapter

SIZE

A4

REV

B

DWG NO.

00600A2B2G3017

4

3

2

1