



00600A2H1GA016

Adapter

12GHz 50Ω SMA(F)–Mini SMP(M) Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-12GHz
VSWR	1.15:1(Max.)@DC-12GHz 1.4:1(Max.)@12-18GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Mini SMP Male(Full Detent)
Engagement Force	≤ 19N(1.94kg)
Disengagement Force	≤ 29N(2.96kg)

Mechanical

Durability	SMA:500 Cycles Mini SMP:100 Cycles
------------	---------------------------------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
Body	Stainless Steel	

Outling Drawing (Unit:mm[inch])

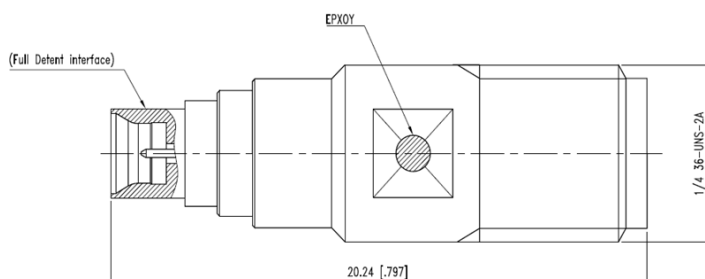

Test Report

