



00600A2H2GA016

Adapter


12GHz 50Ω SMA(F)–SMPM(F)(Mini SMP/ SSMP) Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

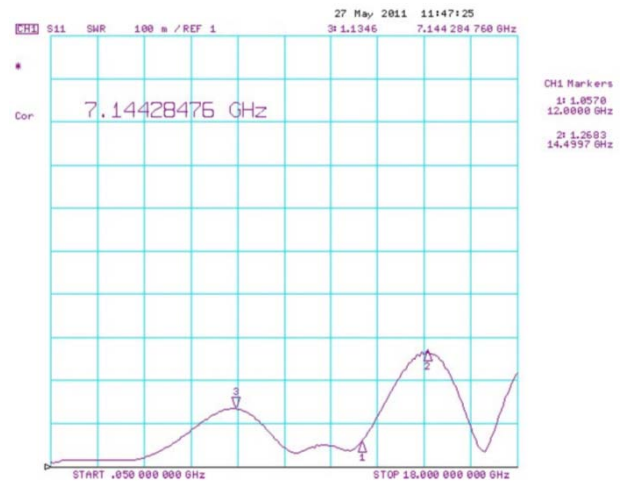

Electrical Specifications

Frequency	DC-12GHz
VSWR	1.15:1(Max.)@DC-12GHz 1.4:1(Max.)@12-18GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Mini SMP Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
Body	Beryllium Copper	Gold

Outling Drawing (Unit:mm[inch])

