

4

3

2

1

Features:

High Repeatability

Low VSWR

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Insertion Loss:0.5dB(Max.)

Impedance: 50Ohm

Connection:MCX Plug to SMA Female

Mechanical:

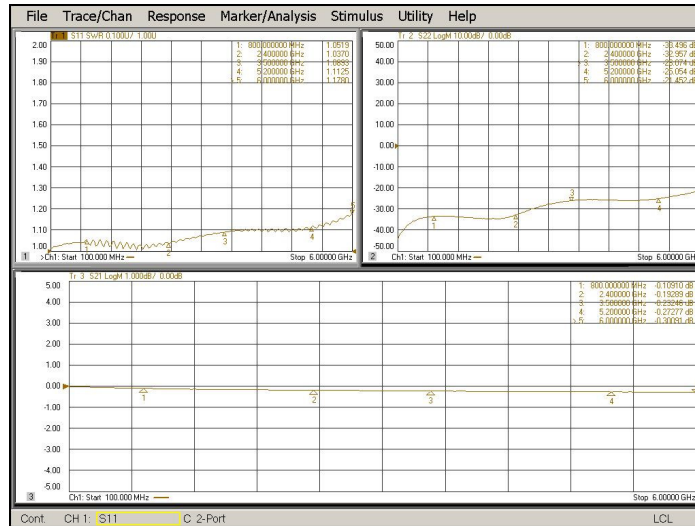
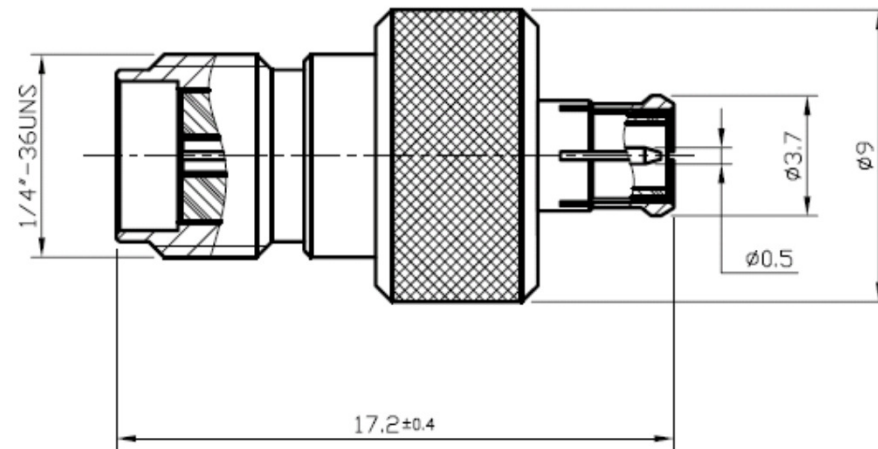
Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C



Unit:mm

**Material:**

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Body	Phosphor Bronze	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

09/01/14'

ENGR Jack

09/01/14'

APVD James

09/01/14'



Woken Technology Inc.

CODE

DWG TITLE

6GHz 50Ω MCX(P)-SMA(F) Adapter

SIZE

A4

REV

D

DWG NO.

00600A2M1N3017

4

3

2

1