
Rev:E

00600A2M2N3017

Adapter


8GHz 50ΩMCX(J)-SMA(F) Adapter/Gold

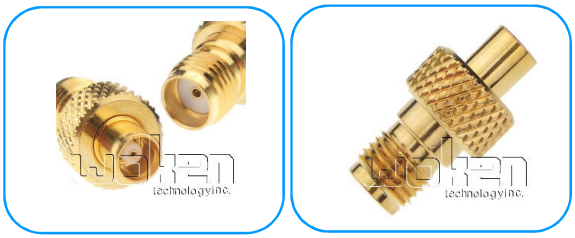

Features

- High Repeatability
- Low VSWR

Test Report

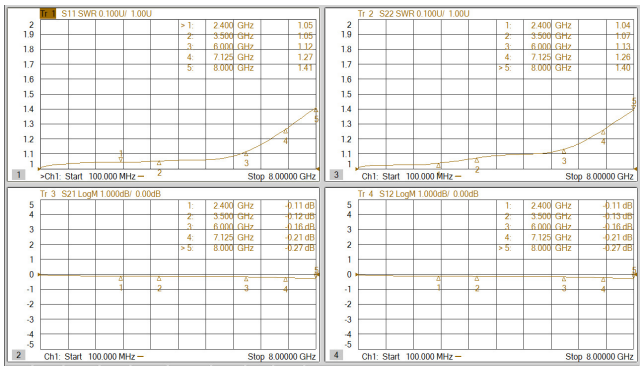

Electrical Specifications

Frequency	DC-8GHz
Impedance	50Ohm
VSWR	1.3:1(Max.)@DC-6GHz
	1.5:1(Max.)@6-8GHz
Insertion Loss	0.5dB(Max.)
Connection	MCX Jack-SMA Female

Mechanical

Durability	500 Cycles

Environmental

Operating Temperature	-40℃~85℃

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm) ±0.1mm

