

4

3

2

1

Features:

High Repeatability
Low VSWR



Unit:mm

Specifications:**Electrical:**

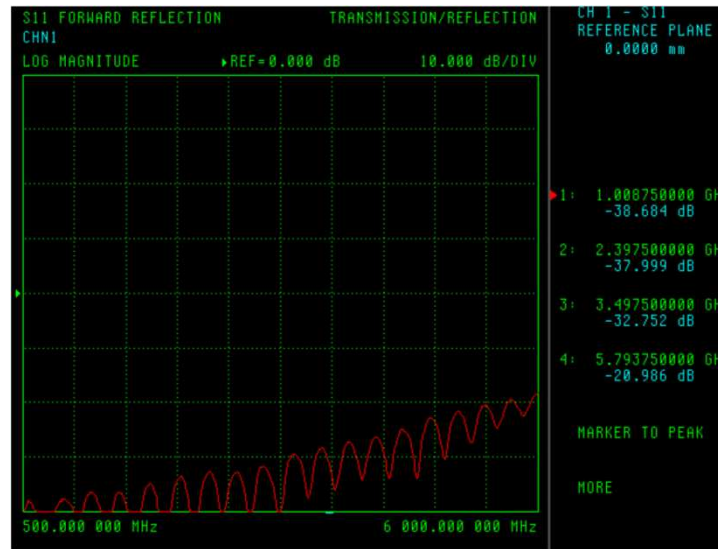
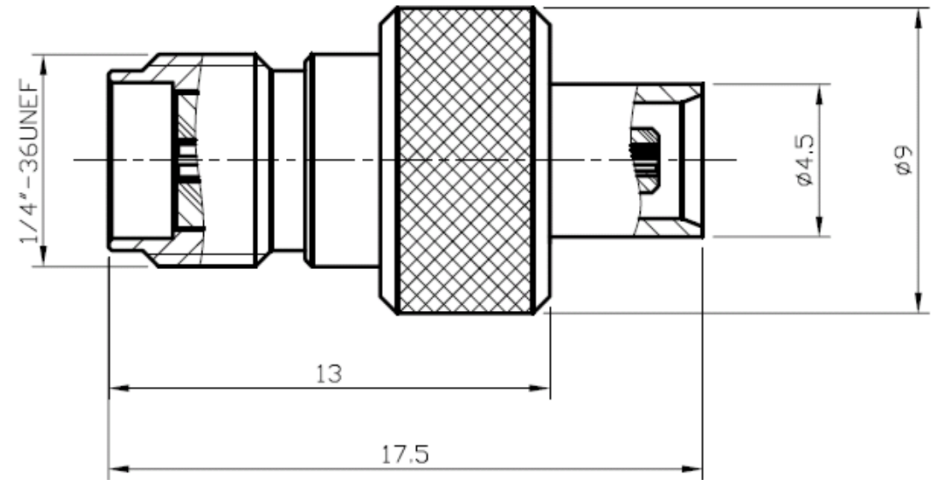
Frequency:DC-6GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 50Ohm
Connection:MCX Female-SMA Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Body	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø/0.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

09/03/14'

09/03/14'

09/03/14'



Woken Technology Inc.

CODE

DWG TITLE

6GHz 50Ω MCX(F)-SMA(F) Adapter

SIZE

A4

REV

D

DWG NO.

00600A2M2N3017

4

3

2

1