



00600A2N1NA02L

Adapter

10GHz 50Ω N(M)–SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	N Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------


Material

Part	Material	Plated
Body	Brass	Electroless Nickel
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
C-Ring	Stainless Steel	
Gasket	Silicone	
Shell	Brass	Electroless Nickel


Insertion Loss

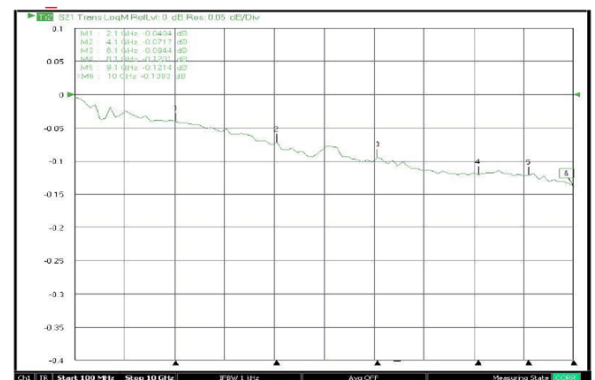

VSWR

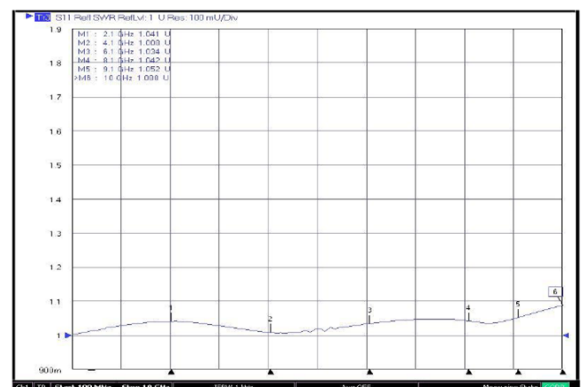

Outling Drawing (Unit:mm) Tolerance:X:±0.2 ,X.X:±0.1 ,X.XX:±0.05

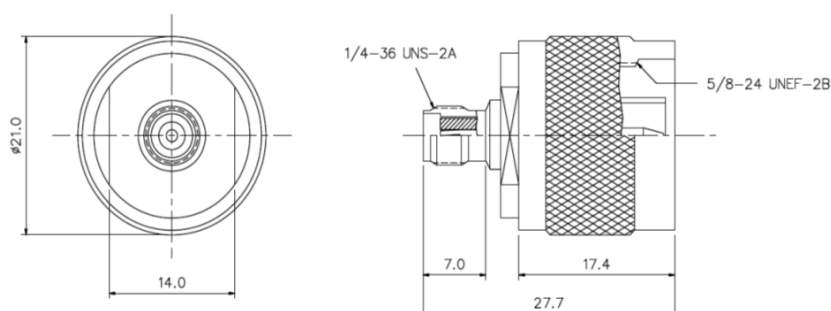

All Specification Changed Without Notification.