



# 00600A2N1NA06L

## Adapter

6GHz 50Ω 六角N(M)-SMA(F)  
Adapter/Nickel


### Features

- ✓ High Repeatability
- ✓ Low VSWR




### Test Report

Insertion Loss

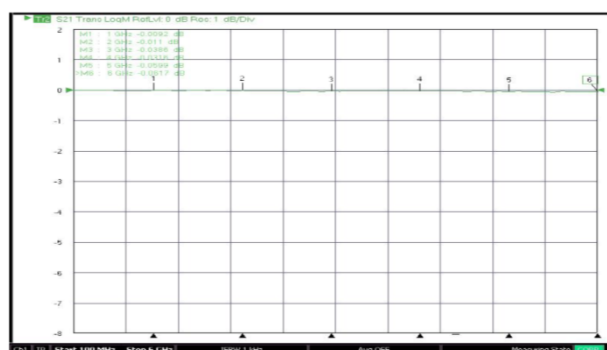

VSWR

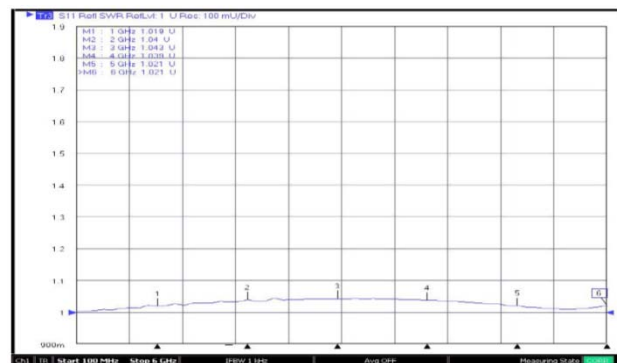

### Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)
Impedance	50Ohm
Connection 1	N Male
Connection 2	SMA Female

### Mechanical

Durability	500 Cycles
------------	------------



### Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

### Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
C-Ring	Stainless Steel	
Gasket	Silicon	
Shell	Brass	Nickel

### Outling Drawing (Unit:mm) Tolerance:±0.1mm

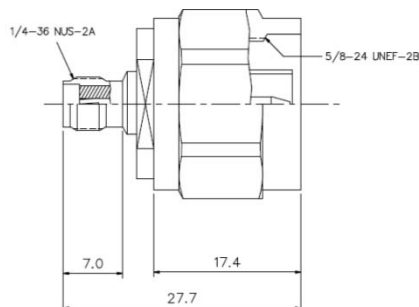

All Specification Changed Without Notification.