



00600A2N2NA01L

Adapter

10GHz 50Ω N(F)–SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-10GHz
VSWR	DC-6GHz:1.2:1(Max.) 6-10GHz:1.3:1(Max.)
Impedance	50Ohm
Connection 1	N Female
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------


Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	PTFE	

Outling Drawing (Unit:mm) Tolerance:X:±0.2 ,X.X:±0.1 ,X.XX:±0.05

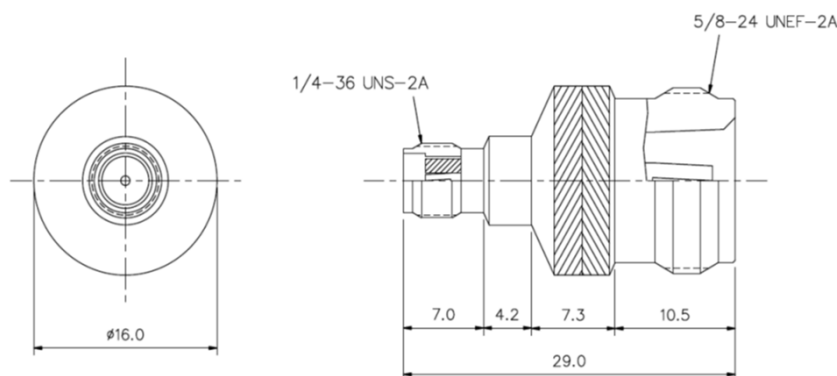

Test Report

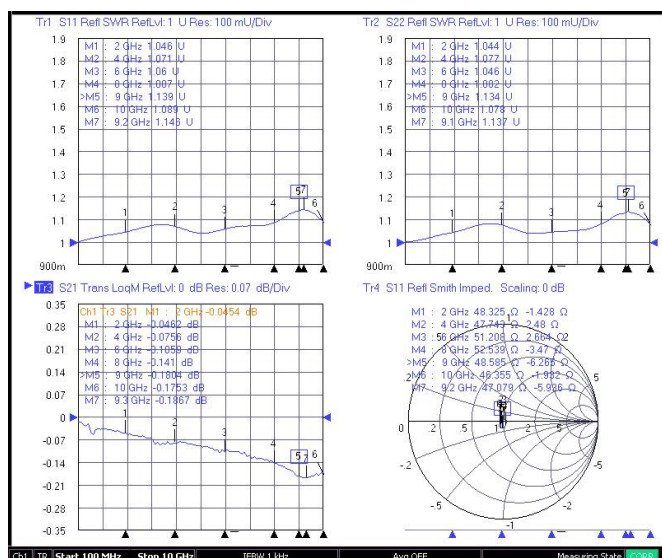

All Specification Changed Without Notification.