



00600A2N2NA03L

Adapter

18GHz 50Ω N(F)–SMA(F)  
Adapter/Nickel

### Features

- High Repeatability
- Low VSWR



### Test Report

### Electrical Specifications

|                |                                              |
|----------------|----------------------------------------------|
| Frequency      | DC-18GHz                                     |
| VSWR           | 1.3:1(Max.)                                  |
| Insertion Loss | 0.2dB(Max.)@DC-10GHz<br>0.3dB(Max.)@10-18GHz |
| Impedance      | 50Ohm                                        |
| Connection 1   | SMA Female                                   |
| Connection 2   | N Female                                     |

### Mechanical



|            |            |
|------------|------------|
| Durability | 500 Cycles |
|------------|------------|

### Environmental


|                       |             |
|-----------------------|-------------|
| Operating Temperature | -65°C~155°C |
|-----------------------|-------------|

### Material

| Part       | Material         | Plated             |
|------------|------------------|--------------------|
| Body       | Brass            | Electroless Nickel |
| Center Pin | Beryllium Copper | Gold               |
| Insulator  | Teflon           |                    |

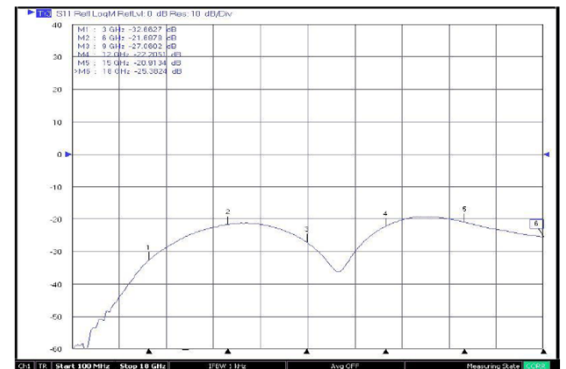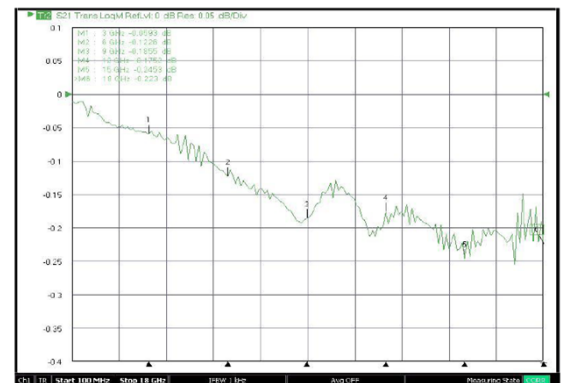

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

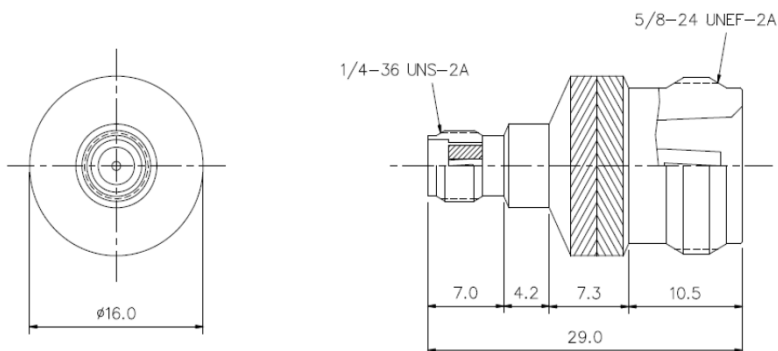

All Specification Changed Without Notification.