



00600A2N2NB01L

Adapter

10GHz 50Ω N(F)–SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	N Female

Mechanical


Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Electroless Nickel
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	

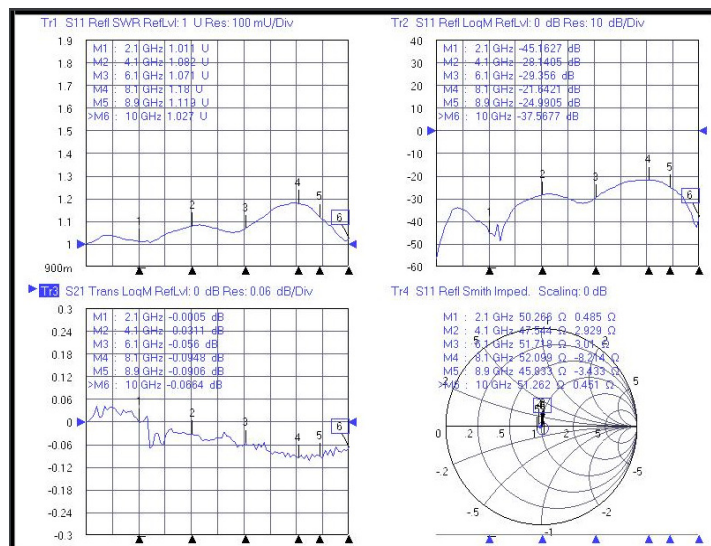

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

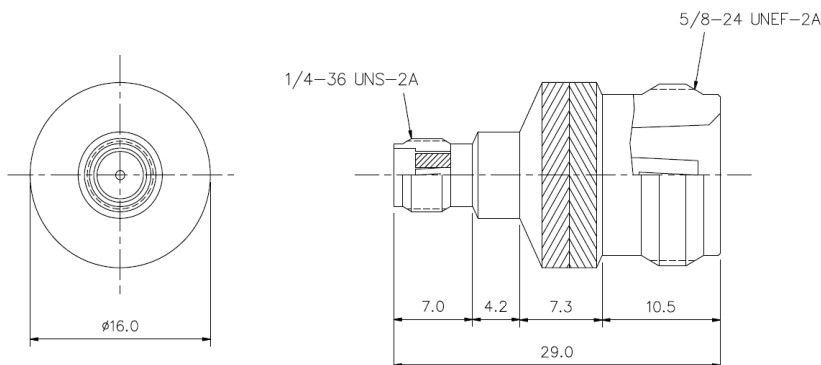

All Specification Changed Without Notification.