



00600A2NANA01L

Adapter


8GHz 50Ω Quick N(M)–SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

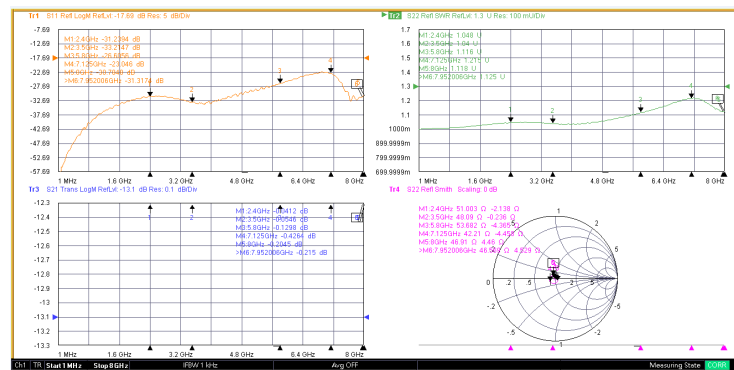

Electrical Specifications

Frequency	DC-8GHz
VSWR	1.3:1(Max.)
Impedance	50ohm
Connection 1	Quick N Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Contact	Phosphor Bronze	Gold
Insulator	PTFE	
C-Ring	Stainless Steel SUS304	
Gasket	Silicon	
Shell	Brass	Nickel

Outling Drawing (Unit:mm)

