Rev:A











High Repeatability

Low VSWR

## **Electrical Specifications**

Frequency	DC-11GHz
VSWR	1.2:1(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	TNC Female



# **Test Report**

1.7	M1 : 1 GHz 1.09 U	1		
	M2 2 GHz 1.106 U			
	M3 3 GHz 1.13 U			
1.6	M4 4 GHz 1 157 U	 		 
1.0	M5 : 5 GHz 1.179 U	1		
	M6 : 6 GHz 1.187 U			
	M7 : 7 GHz 1.175 U			
1.5	M0 : 0 GHz 1.143 U	 	-	 
	M9 : 9 GHz 1.098 U			



# 00600A2T2N401V


## **Mechanical**

Durability 500 Cycles
-----------------------

# Environmental

Operating Temperature -40°C


-40°C~85°C

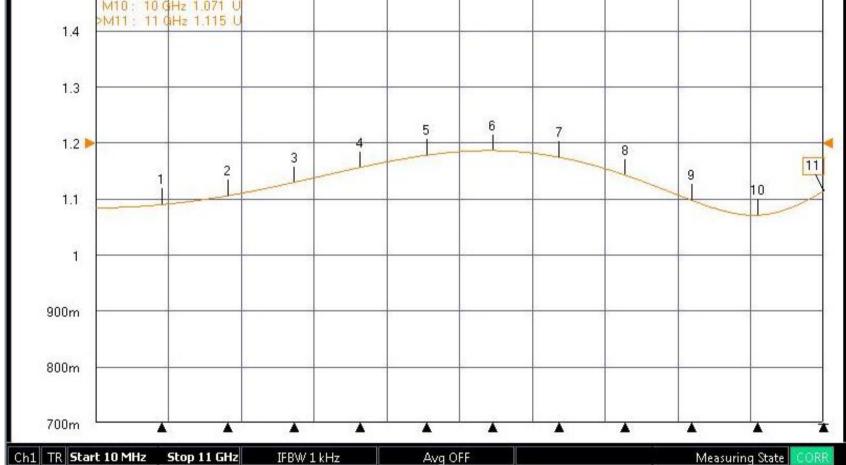

## **Material**

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	PTFE	
Press Washer	Brass	Nickel

# Outling Drawing (Unit:mm)

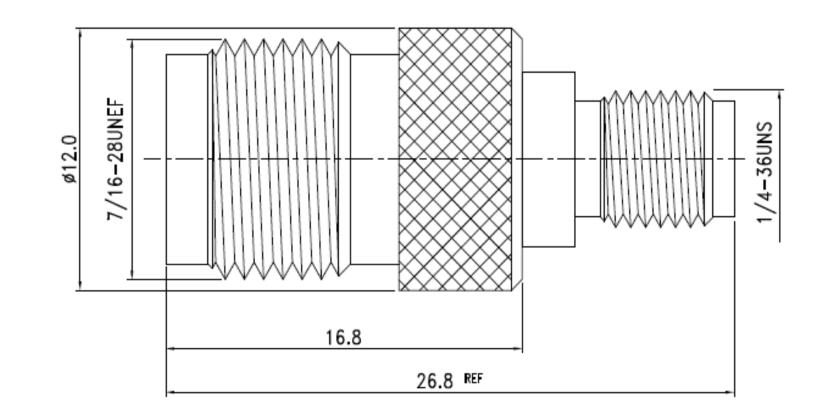

#### All Specification Changed Without Notification.

### Web:http://www.woken.com.tw

#### Web: http://www.wokentech.com

## E-Mail: sales@woken.com.tw