

4

3

2

1

Features:

High Repeatability
Low VSWR

**Specifications:****Electrical:**

Frequency:DC-3.5GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 50Ohm
Connection: SMA Female-Quick TNC Male

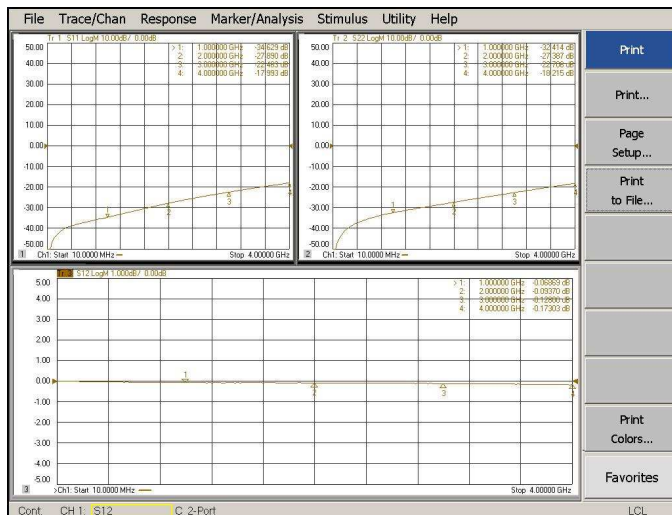
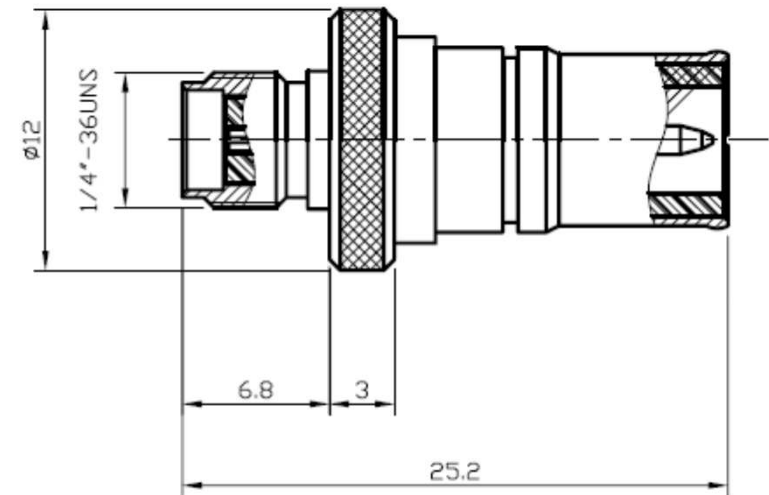
Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

Unit:mm

**Material:**

Part	Material	Plated
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

07/16/14'

07/16/14'

07/16/14'



Woken Technology Inc.

CODE

DWG TITLE

3GHz SMA(F)-Quick TNC(M) Adapter

SIZE

A4

REV

B

DWG NO.

00600A2TANA987

4

3

2

1