



00600A3A2GA01L

Adapter

10GHz 50Ω Reverse SMA(M)–SMA(F)
Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Insertion Loss	0.3dB(Max.)
Impedance	50Ohm
Connection 1	Reverse SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------


Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
C-Ring	Beryllium Copper	Gold
Gasket	Silicone	
Shell	Brass	Gold

Test Report

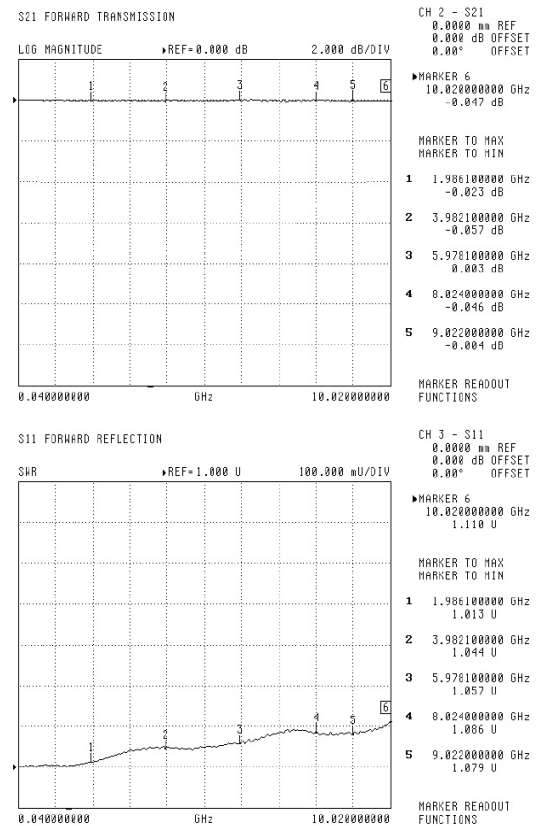

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

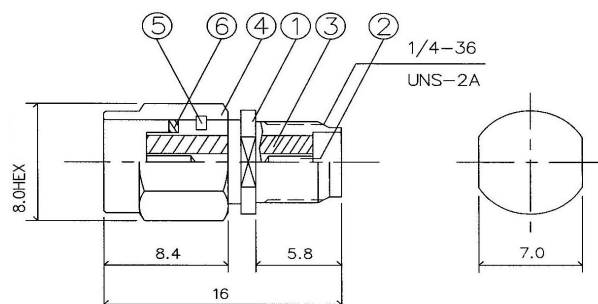

All Specification Changed Without Notification.