

4

3

2

1

Features:

High Repeatability
Low VSWR

**Specifications:****Electrical:**

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm

Connection: Reverse SMA Male to Reverse SMA Male

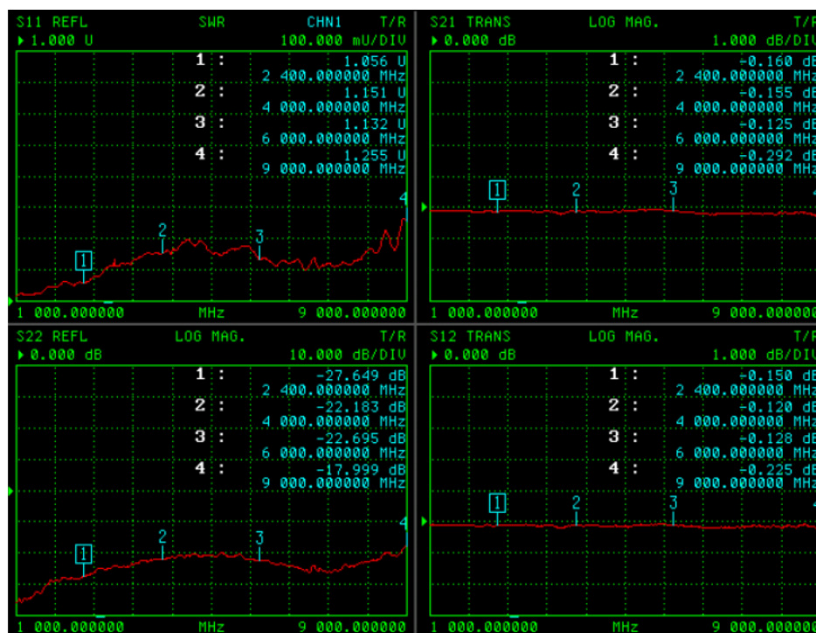
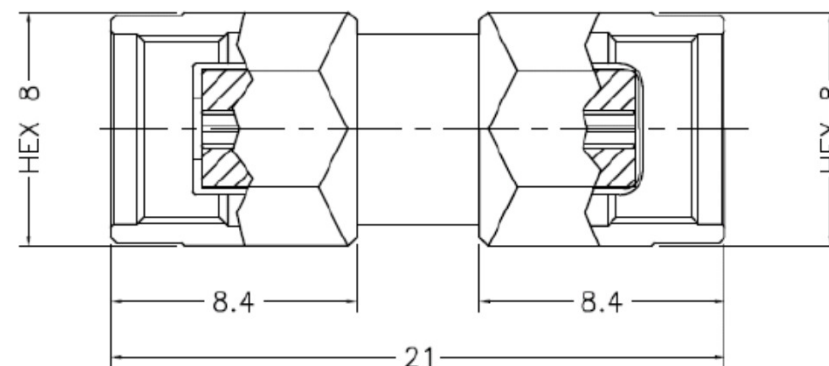
Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65℃~155℃

Unit:mm

**Material:**

Part	Material	Plated
Inner Retaining Ring	SK5	Gold
Gasket	S.L. Rubber	
Body	Brass	Gold
Shell	Brass	Gold
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

02/01/10'

02/01/10'

02/01/10'



Woken Technology Inc.

CODE

DWG TITLE

6GHz 50Ω Reverse SMA(M)-

Reverse SMA(M) Adapter

SIZE

A4

REV

A

DWG NO.

00600A3A3GA017

4

3

2

1