





00600A3A3GD01L

Adapter

10GHz 50Ω Reverse SMA(M)– Reverse SMA(M) R/A Adapter

Features

- High Repeatability
- Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.2:1(Max.)
Impedance	50Ω
Connection 1	Reverse SMA Male
Connection 2	Reverse SMA Male

Mechanical


Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
Gasket	Silicone Rubber	
C-Ring	Beryllium Copper	Gold
Shell	Brass	Gold

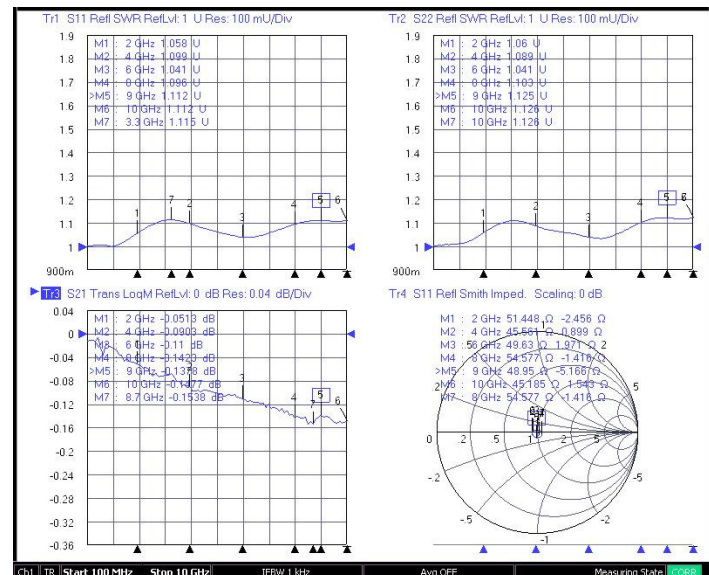

Outling Drawing (Unit:mm) Tolerance:X=±0.2mm ,X.X=±0.1mm,X.XX=±0.05mm

