



00600A3A5DA02L

Adapter

10GHz 50Ω Reverse SMA(M)– Reverse SMA(F) R/A Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.35:1(Max.)
Impedance	50Ohm
Connection 1	Reverse SMA Male
Connection 2	Reverse SMA Female

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
C-Ring	Beryllium Copper	
Gasket	Silicon	
Shell	Brass	Gold

Test Report

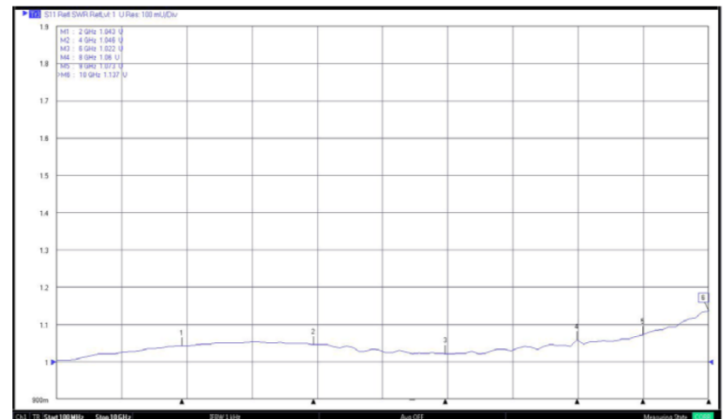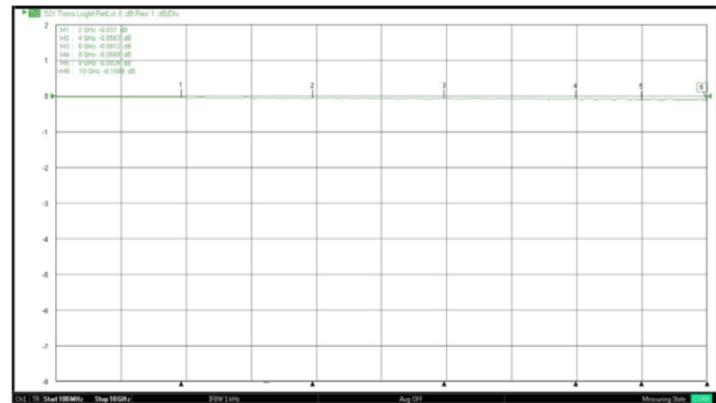

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

