

Features:

High Repeatability

Low VSWR



Specifications:

Electrical:

Frequency:DC-4GHz

VSWR:1.5:1(Max.)

Impedance: 50Ohm

Connection: Reverse SMA Male to Reverse TNC Female


Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

Unit:mm

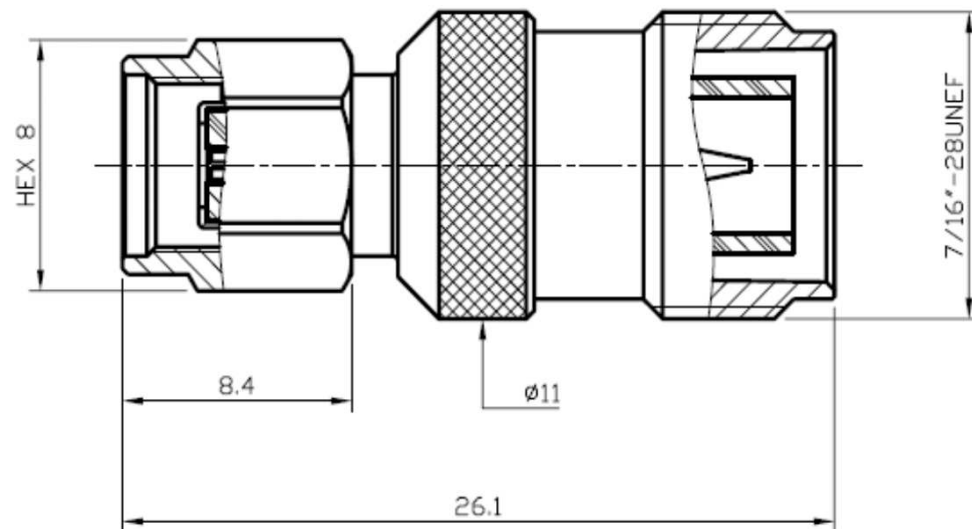

Material:

Part	Material	Plated
Shell	Brass	Nickel
Press Washer	Brass	Nickel
Gasket	Silicone	
Inner Retaining Ring	Stainless	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

Terence

02/01/10'

ENGR

Jack

02/01/10'

APVD

James

02/01/10'



Woken Technology Inc.

CODE

DWG TITLE

SIZE

A4

REV

A

DWG NO.

00600A3T5N2017

4GHz 50Ω Reverse SMA(M)-

Reverse TNC(F) Adapter