



00600A5A9GA01G

Adapter

6GHz 50Ω Reverse SMA(F)– SMA(F)Bulkhead Adapter with O– ring

Features

- High Repeatability
- Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ω
Connection 1	Reverse SMA Female
Connection 2	SMA Female Bulkhead

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
Gasket	Silicone Rubber	Red
Nut	Brass	Gold
Washer	Brass	Gold

Outling Drawing (Unit:mm)

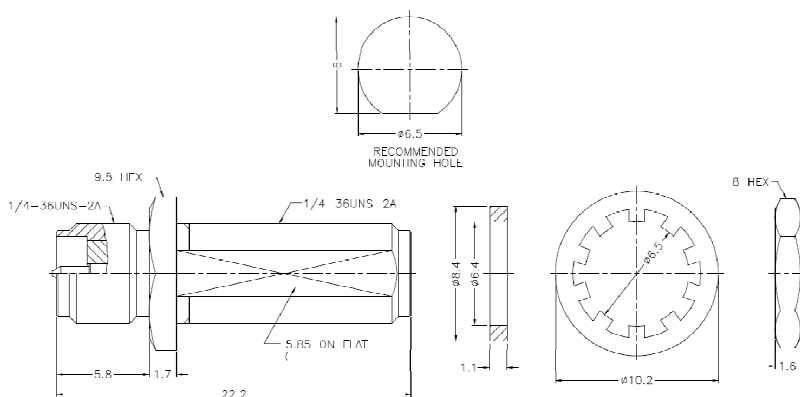

Test Report

