







Rev:A

## 00600A5A9GA01N

## Adapter

### 6GHz 50Ω Reverse SMA(F)-SMA(F)Bulkhead Adapter

#### **Features**

\*

High Repeatability



Low VSWR

# lech

#### **Electrical Specifications**

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	SMA Female Bulkhead
Connection 2	Reverse SMA Female


#### **Mechanical**

Durability	500 Cycles
------------	------------

#### **Environmental**

Operating Temperature	-40°C~85°C
-----------------------	------------


#### **Test Report**

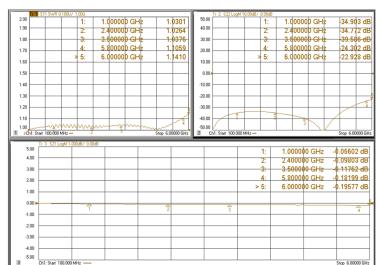


#### **Material**

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Nut	Brass	Gold
Washer	Brass	Gold

#### Outling Drawing (Unit:mm) Tolerance:±0.4mm

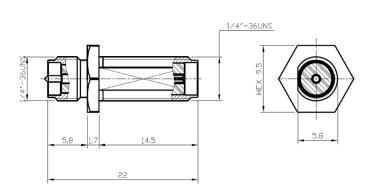



All Specification Changed Without Notification.