



00600A5A9GA02N

Adapter

18GHz 50Ω Reverse SMA(F)–SMA(F)Bulkhead Adapter

Features



High Repeatability



Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	1.1:1(Max.)@DC-6GHz
	1.2:1(Max.)@6-18GHz
Impedance	50Ohm
Connection 1	SMA Female Bulkhead
Connection 2	Reverse SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Nut	Brass	Gold
Washer	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

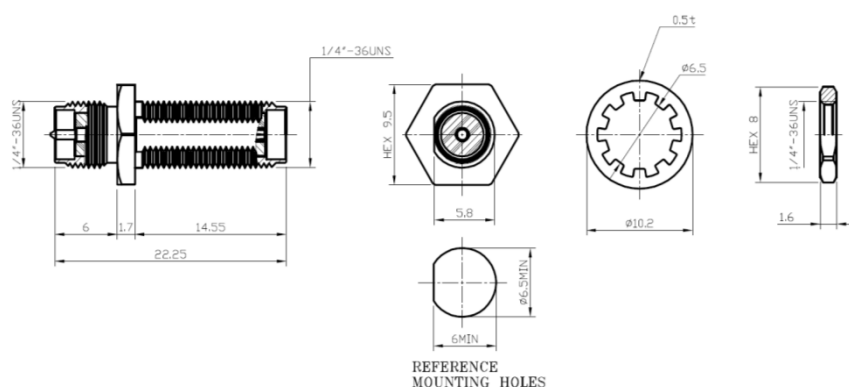

All Specification Changed Without Notification.