




00600A5AAG0027

Adapter

12GHz Quick SMA(M)–Reverse SMA(F) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications


Frequency	DC-12GHz
VSWR	1.3:1(Max.)@DC-10GHz 1.35:1(Max.)@10-12GHz
Impedance	50Ohm
Connection 1	Quick SMA Male
Connection 2	Reverse SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

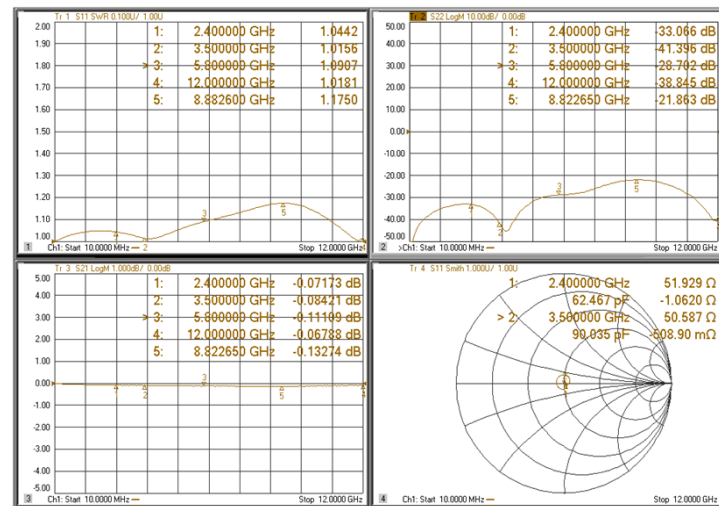

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Press Body	Beryllium Copper	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

