



00600A5AEG6027

Adapter


12GHz 50Ω Reverse Quick SMA(M)– Reverse SMA(F) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

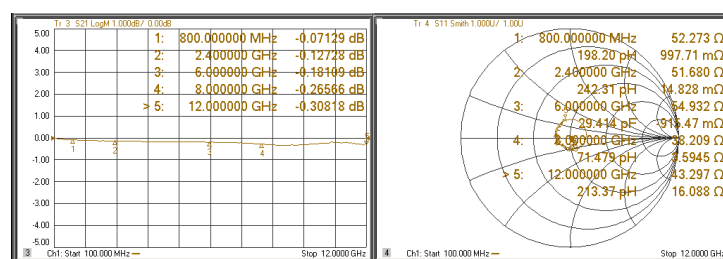

Electrical Specifications

Frequency	DC-12GHz
VSWR	1.3:1(Max.)@DC-10GHz 1.35:1(Max.)@10-12GHz
Impedance	50Ohm
Connection 1	Reverse Quick SMA Male
Connection 2	Reverse SMA Female

Mechanical


Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Press Body	Beryllium Copper	Gold

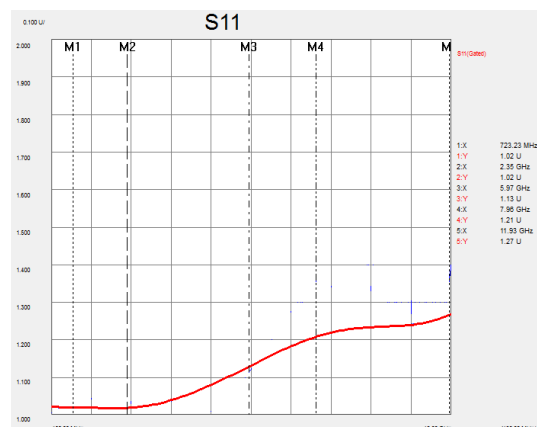

Outling Drawing (Unit:mm) Tolerance:±0.1mm

