

4

3

2

1

Features:

High Repeatability
Low VSWR

**Specifications:****Electrical:**

Frequency:DC-10GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm

Connection: Reverse SMA Female to Reverse SMA Female

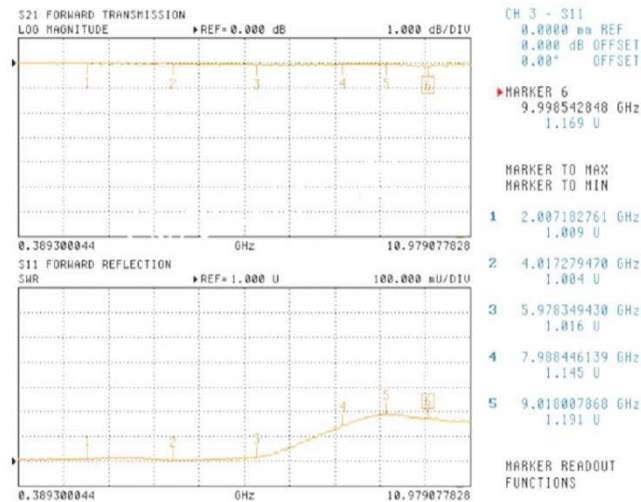
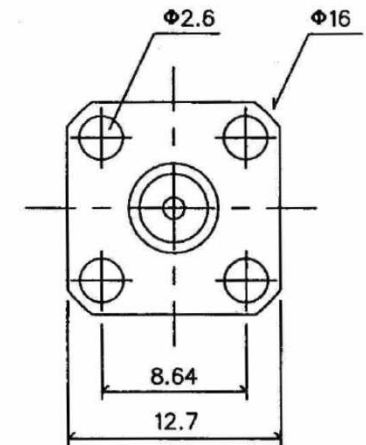
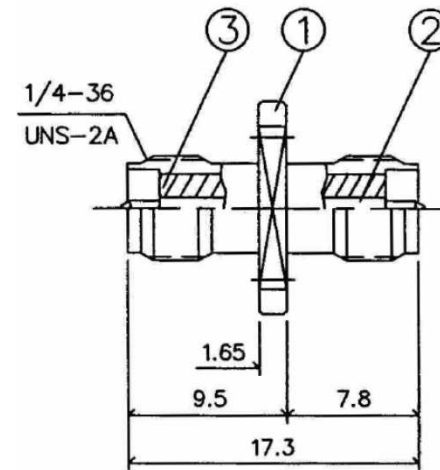
Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

Unit:mm

**Material:**

Part	Material	Plated
1.Body	Brass	Gold
2.Center Pin	Brass	Gold
3.Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø0.50 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

06/22/12'

06/22/12'

06/22/12'



Woken Technology Inc.

CODE

DWG TITLE

10GHz Reverse SMA(F)-Reverse

SMA(F) 4Hole Flange Adapter

SIZE

A4

REV

B

DWG NO.

00600A5AHGA01L

4

3

2

1