



00600AAA2GA01L

Adapter

10GHz 50Ω Quick SMA(M)–SMA(F) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.1dB(Max.)
Impedance	50Ohm
Connection 1	Quick SMA Male
Connection 2	SMA Female

Mechanical



Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium copper	Gold
Insulator	Teflon	
Gasket	Silicone Rubber	
C-Ring	Beryllium Copper	Gold

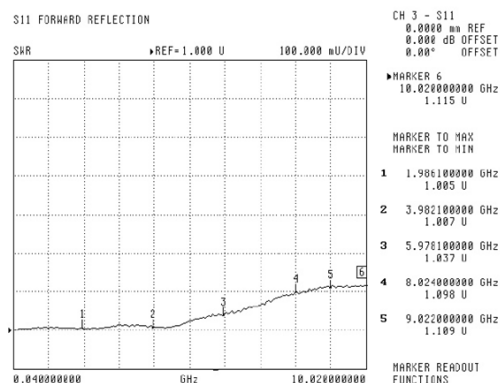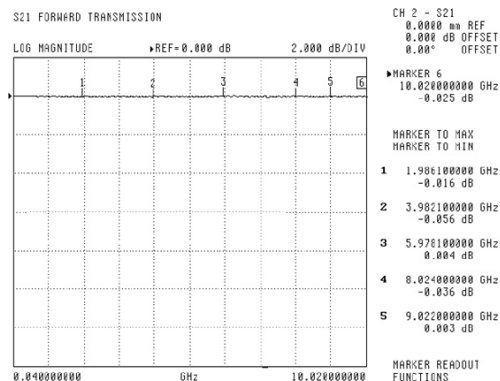

Outling Drawing (Unit:mm) Tolerance:X=±0.2mm ,X.X=±0.1mm,X.XX=±0.05mm

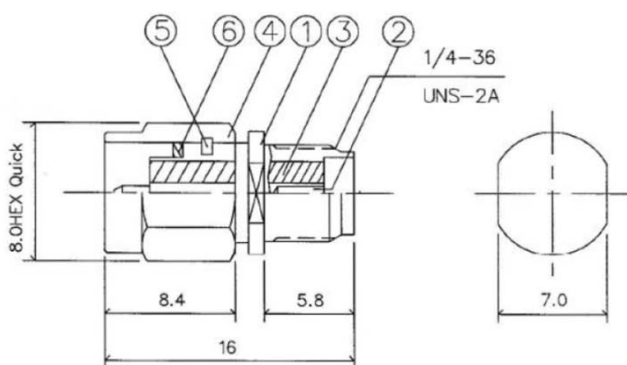

All Specification Changed Without Notification.