



00600AAA2N301G

Adapter

18GHz 50Ω Quick
SMA(M)/Stainless-SMA(F)/Nickel
2Hole Spring Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.15:1(Max.)@DC-6GHz 1.30:1(Max.)@6-12GHz 1.35:1(Max.)@12-18GHz
Impedance	50Ohm
Connection 1	Quick SMA Male
Connection 2	SMA Female

Mechanical


Durability	500 Cycles
Spring Force	400gf±30gf~590gf±30gf@0~1.7mm

Environmental



Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Spring	SWP	Nickel
Inner Retaining Ring	Brass	
O-ring	Silicone	
Nut	Stainless Steel	

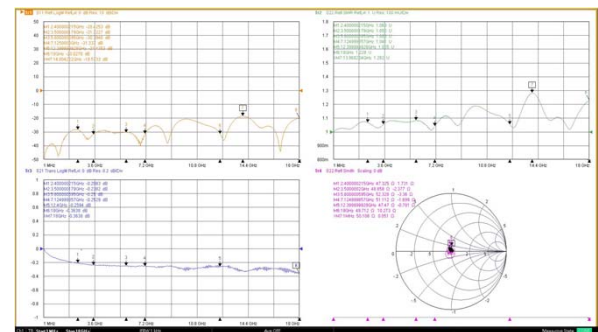

Outling Drawing (Unit:mm)

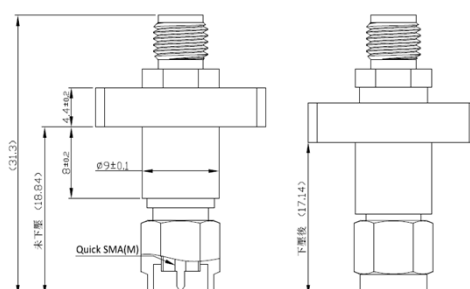

All Specification Changed Without Notification.