

4

3

2

1

Features:

High Repeatability
Low VSWR



Unit:mm

Specifications:**Electrical:**

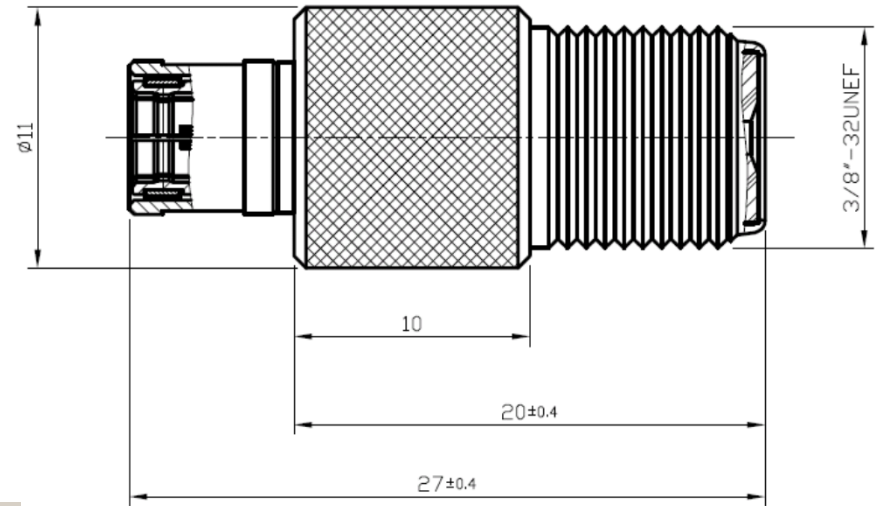
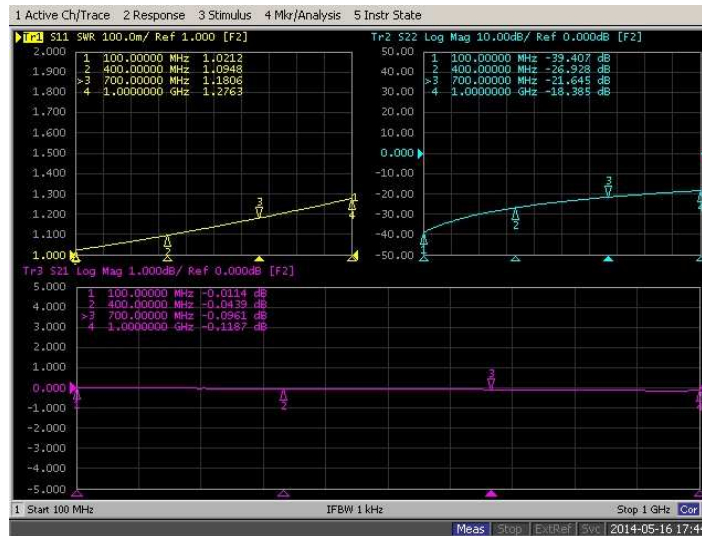
Frequency:DC-1GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 75Ohm
Connection: F Female to SMB Plug

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Inner Retaining Ring	Beryllium Copper	Nickel
Insulator	Teflon	
Center Pin	Brass	Gold
Body	Brass	Nickel
Center Contact	Beryllium Copper	Gold
Shell	Brass	Nickel


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN

ENGR

APVD

Terence

Jack

James

08/11/14'

08/11/14'

08/11/14'



Woken Technology Inc.

CODE

DWG TITLE

1GHz 75Ω F(F)-SMB(P) Adapter

SIZE

A4

REV

C

DWG NO.

00600B1F2M9017