

4

3

2

1

Features:

High Repeatability
Low VSWR

**Specifications:****Electrical:**


Frequency:DC-3GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 75Ohm
Connection: BNC Male to BNC Male

Mechanical:


Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

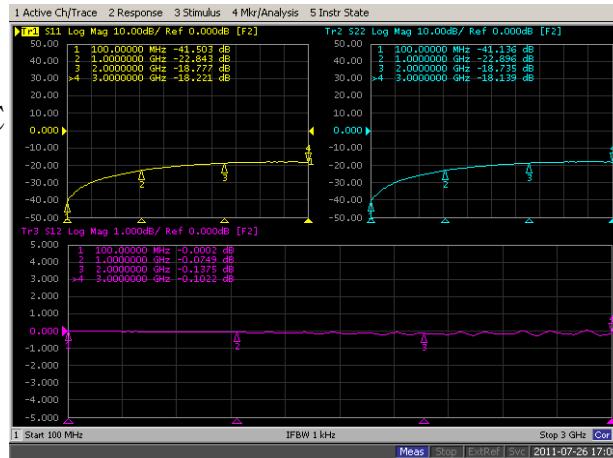

Unit:mm

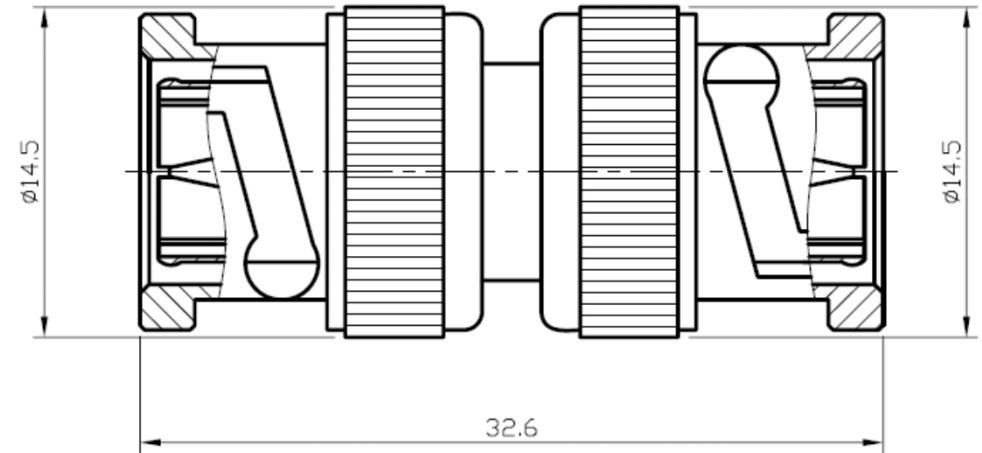**Material:**

Part	Material	Plated
Shell	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Gasket	Rubber	
Inner Retaining Ring	Stell	Nickel
Spring	SK5	Nickel
Washer	Stell	Nickel
Body	Brass	Nickel


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN Terence 08/11/14'

ENGR Jack 08/11/14'

APVD James 08/11/14'



Woken Technology Inc.

CODE

DWG TITLE

75Ω BNC(M)-BNC(M) Adapter

SIZE

A4

REV

C

DWG NO.

00600D1D1MA997

3

2

1

A