



00600D1F2M901G

Adapter


**3GHz 75Ω BNC(M)-F(F)
Adapter/Nickel**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

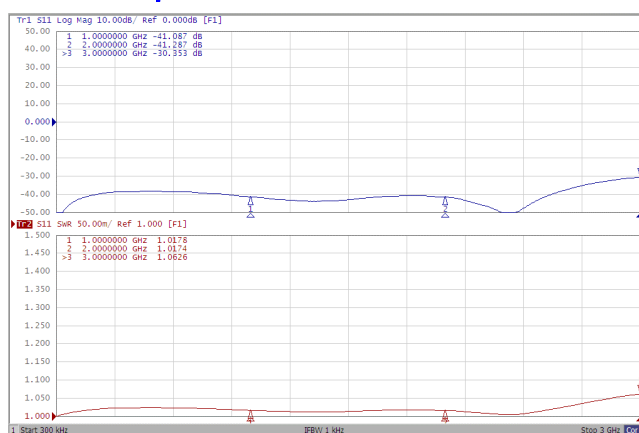

Electrical Specifications

Frequency	DC-3GHz
VSWR	1.2:1(Max.)
Impedance	75Ohm
Connection 1	BNC Male
Connection 2	F Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Center Contact	Beryllium Copper	Gold
Insulator	Teflon	
Washer	Brass	Nickel
Spring	SK5	Nickel
Inner Retaining Ring	Brass	Nickel
Gasket	Silicone	Red
Shell	Brass	Nickel

Outling Drawing (Unit:mm)

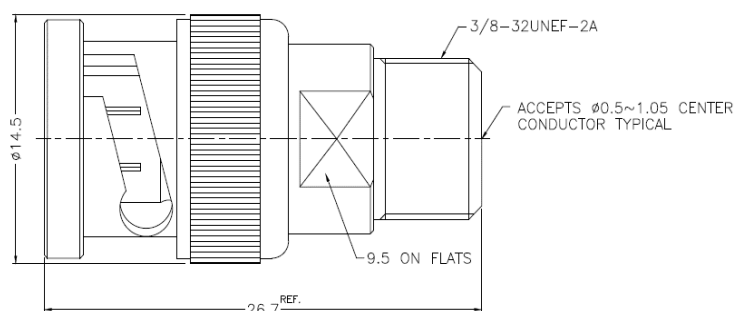

Note: If母頭若使用較大外徑的公PIN 進行插拔後，母針的接觸會被撐開，
若此時再使用外徑較小 的公PIN 去插拔，可能會有接觸不全的問題，
因此建議只能由最小的外徑(0.5mm)往最大的外徑(1.05mm)替換

All Specification Changed Without Notification.