

4

3

2

1

Features:

High Repeatability
Low VSWR





Unit:mm

Specifications:**Electrical:**

Frequency:DC-4GHz
VSWR:1.5:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 50Ohm
Connection: BNC Male to N Female

Mechanical:

Durability:500 Cycles

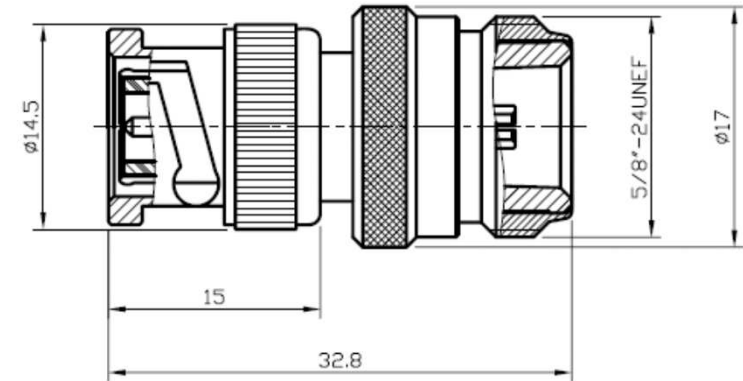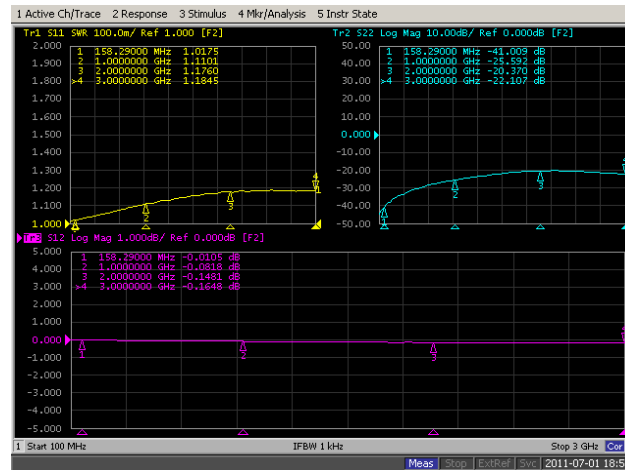

woken
technology inc.

**Material:**

Part	Material	Plated
Body	Brass	Nickel
Retaining Holder	Brass	
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Washer	Steel	Nickel
Spring	SK5	Nickel
Inner Retaining Ring	Steel	Nickel
Shell	Brass	Nickel
Gasket	Rubber	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				  Woken Technology Inc.	
INTEGRAL DIMENSIONS ± TOLINT		ANGULAR DIMENSIONS ±TOLANG		CODE	DWG TITLE
x	±0.38 .xx ±0.15	HOLES UNDER Ø5.0 ±0.05		SIZE A4	4GHz 50Ohm BNC(M)-N(F) Adapter
.x	±0.25 .xx x ±0.05				
THIRD ANGLE PROJECTION	DRAWN	Terence	07/21/14'	REV D	DWG NO. 00600D1N2NA017
	ENGR	Jack	07/21/14'		
	APVD	James	07/21/14'		

4

3

2

1