

4

3

2

1

**Features:**

High Repeatability  
Low VSWR



unit:mm

**Specifications:****Electrical:**

Frequency:DC-3GHz

VSWR:1.35:1(Max.)

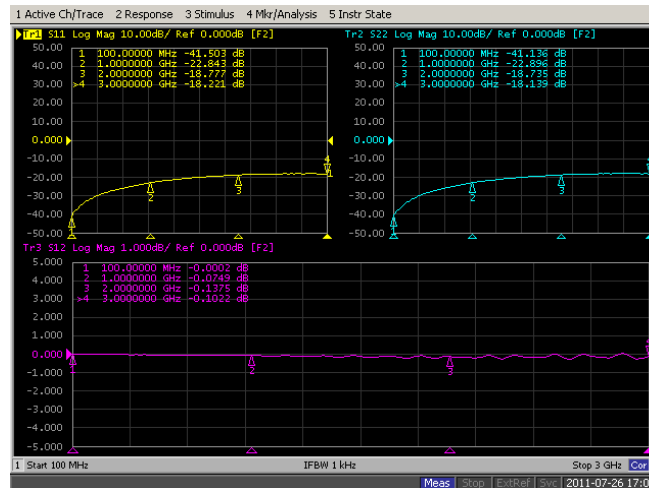
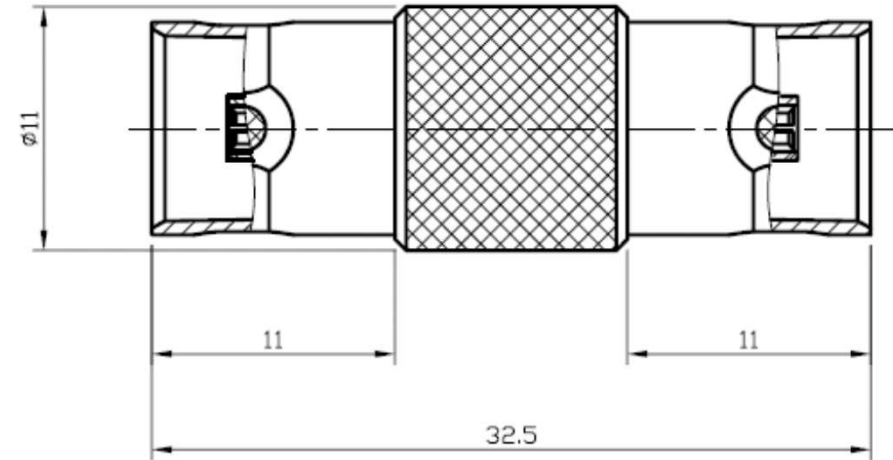
Insertion Loss:0.5dB(Max.)

Impedance: 75Ohm

Connection: BNC Female to BNC Female

**Mechanical:**

Durability:500 Cycles

**Material:**

| Part         | Material | Plated |
|--------------|----------|--------|
| Press Washer | Brass    | Nickel |
| Center Pin   | Brass    | Gold   |
| insulator    | POM      |        |
| Body         | Brass    | Nickel |


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS  
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN Terence  
ENGR Jack  
APVD James

07/21/14'  
07/21/14'  
07/21/14'



Woken Technology Inc.

CODE

DWG TITLE

3GHz 75Ω BNC(F)-BNC(F) Adapter

SIZE

A4

REV C

DWG NO.

00600D2D2N2017

4

3

2

1