



00600D2F2MA017

Adapter

3GHz 75Ω BNC(F)–F(F) Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-3GHz
VSWR	1.3:1(Max.)
Impedance	75Ohm
Connection 1	BNC Female
Connection 2	F Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Center Contact	Beryllium Copper	Gold
Press Washer	Brass	Nickel

Outling Drawing (Unit:mm) Tolerance:±0.4mm

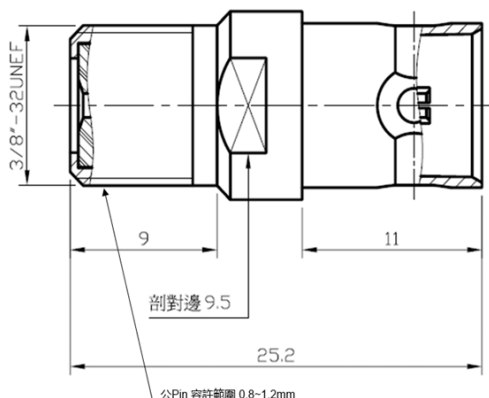

Note.1.F母頭為英制規格

2. 若使用較大外徑的公PIN 進行插拔後，母針的接觸會被撐開，
若此時再使用外徑較小的公PIN 去插拔，可能會有接觸不全的問題，
因此建議只能由最小的外徑(0.8mm)往最大的外徑(1.2mm)替換